




# STREAMMO SEACROSSER


FLOORING FOR SHIPS AND OFFSHORE PLATFORMS

**Gerflor**<sup>®</sup>  
theflooringgroup

# STREAMO SEACROSSER



- High performing flexible homogeneous multipurpose flooring
- Available in sheets and tiles
- Directional marbleised design
- Evercare™ surface treatment: no wax for life
- Densely compacted surface to improve wear resistance
- Bacteriostatic and fungicidal

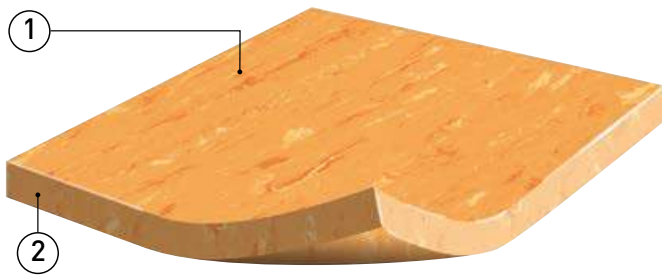

- ① evercare™ treatment
- ② Compacted, calendared floorcovering



An exclusive patented technology by Gerflor.



## The best chemical stain resistance surface treatment

**Highly Durable:** Exclusive surface treatment applied by UV laser cross-linking provides superior durability and an even surface thickness, creating an impenetrable barrier against stains and chemicals found in healthcare like betadine, eosin or anti-bacterial hand gel.

**Longer life expectancy.**

**100% non-porous surface:** The surface treatment creates a 100% non-porous barrier to all liquids and chemicals, keeping all stains floating on the surface.

**Simple and easy stain removal.**

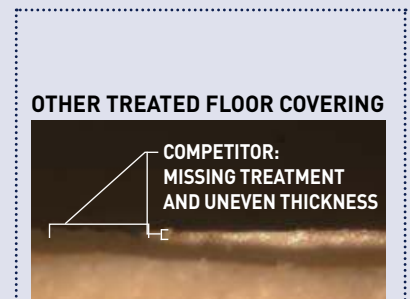

# STREAMO SEACROSSER

---



1009 Light Grey



1010 Grey



1033 Brown



1059 Blue Grey



1040 Dark Grey



1060 Anthracite






1002 Beige



1035 Ocre




1004 Earth

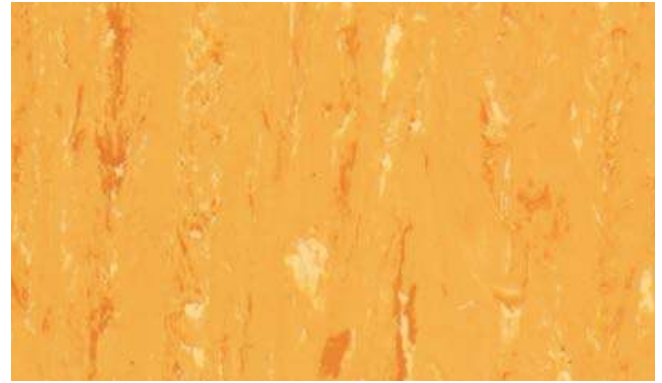

1032 Yellow



1003 Light Ocre

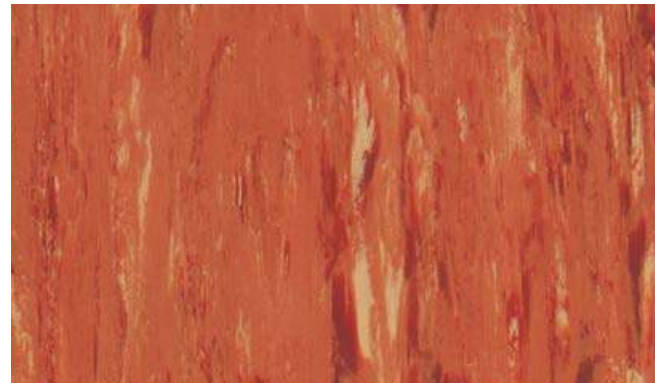

1055 Apricot







1006 Blue




1007 Green

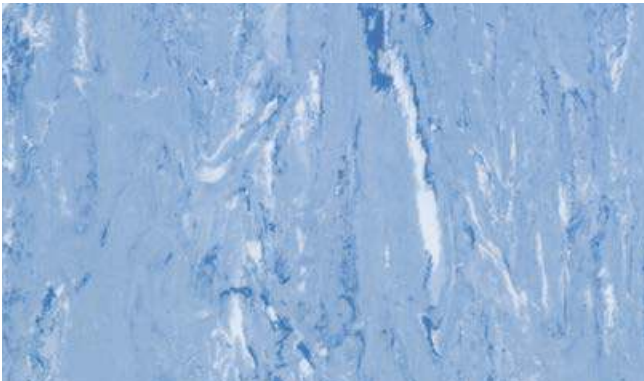


1036 Medium Blue

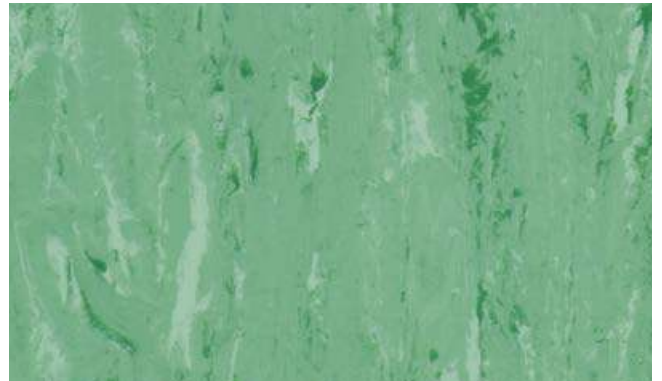

1037 Medium Green

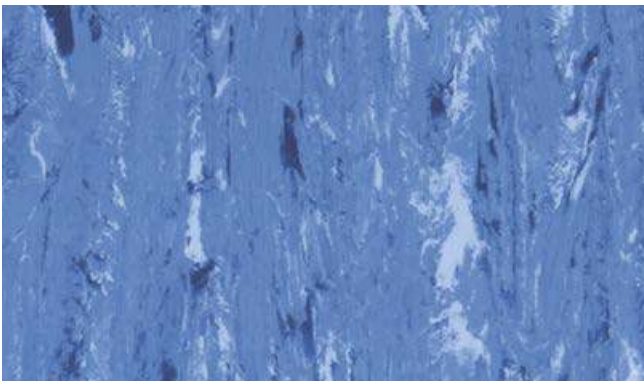

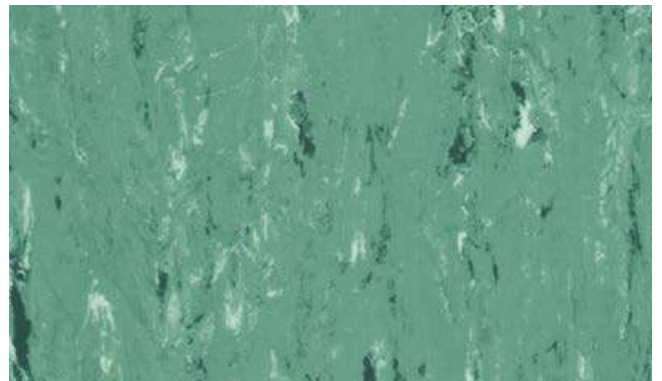

1056 Dark Blue



1057 Dark Green



 Compact sheet without foam backing

 Compact tile without foam backing

**STREAMO SEACROSSER** is a flexible homogeneous calendered compacted floor-covering, with directional marbled design, colour dyed as a raw mixture to ensure even colour throughout the thickness.

Its surface is densely compacted for improved wear and ease of maintenance. It is suitable for heavy traffic areas.

The flooring is protected by Evercare™, the latest improvements in PU surface treatment obtained by UV laser cross-linking.

**STREAMO SEACROSSER** is anti-bacterial and fungicidal. It complies with IMO regulations.

## INSTALLATION

Laying is the responsibility of the installer. Installation should be made in accordance with installation guidelines supplied and regularly updated by Gerflor's Technical Department.

## MAINTENANCE

Maintenance should be carried out regularly to retain the appearance and durability of the floor.

The floorcovering should be maintained with regular sweeping and damp mopping using a neutral cleanser, or machine scrubbing with an appropriate pad.

⚠ Rubber leaves indelible stains on vinyl floorings: do not use mats with rubber backing and replace tubular furniture feet with those made of PVC or polyamide.

Further installation and maintenance instructions are available upon request.

## STREAMO SEACROSSER

DESCRIPTION / DESCRIPTION / BESCHREIBUNG / DESCRIPCIÓN / DESCRIÇÃO / DESCRIZIONE			
Total thickness / <i>Épaisseur totale</i> / Gesamtdicke / <i>Espesor total</i> / <i>Espessura total</i> / <i>Spessore totale</i>	EN ISO 24346 (EN 428)	mm	2.0
Weight / <i>Poids</i> / Gewicht / <i>Peso</i> / <i>Peso</i> / <i>Peso</i>	EN ISO 23997 (EN 430)	g/m <sup>2</sup>	3200
Width/length of sheet / <i>Largeur/longueur des lés</i> / Rollenbreite/Rollenlänge / <i>Ancho/largo de rollos</i> / <i>Largura/comprimento dos rolos</i> / <i>Larghezza/lunghezza dei teli</i>	EN ISO 24341 (EN 426)	cm/lm	200/20
Tile size / <i>Format dalles</i> / Format Fliesen / <i>Dimensiones de las losetas</i> / <i>Dimensões dos mosaicos</i> / <i>Dimensione delle piastre</i>	EN ISO 24342 (EN 427)	mm	608 x 608
Number of tiles per package / <i>Nombre de dalles par boîte</i> / Fliesenanzahl pro Karton / <i>Cantidad de losetas/caja</i> / <i>Quantidade dos mosaicos/caixa</i> / <i>N° piastre per confezione</i>	-	-	20
Sqm/Box / <i>m<sup>2</sup>/boîte</i> / Qm pro Karton / <i>m<sup>2</sup>Bulto</i> / <i>m<sup>2</sup>/Caixa</i> / <i>m<sup>2</sup>/confezione</i>	-	-	7.39
Packages per pallet / <i>Nombre de boîte par palette</i> / Karton pro Palette / <i>Cantidad de caja/paleta</i> / <i>Quantidade de caixas/paleta</i> / <i>N° confezione per pedana</i>	-	-	34
CLASSIFICATION / CLASSIFICATION / KLASSIFIZIERUNG / CLASIFICACIONES / CLASSIFICAÇÕES / CLASSIFICAZIONI			
Norm/product specification / <i>Norme produit</i> / Produkt Norm / <i>Normas</i> / <i>Normas</i> / <i>Norma prodotto</i>	-	-	EN ISO 10581 (EN 649)
Fire rating / <i>Classement feu</i> / Brandverhalten / <i>Fuego</i> / <i>Fogo</i> / <i>Reazione al fuoco</i>	Maritime Approvals	-	MSC 307(88) Part 5
			MSC 307(88) Part 2
			Marine Equipment Directive
			US Coast Guard
			Transport Canada
			SOLAS 74
Static electrical propensity / <i>Potentiel de charge</i> / Begehaufladung / <i>Comportamiento electrostático</i> / <i>Comportamento electrostático</i> / <i>Potenziale di carica</i>	EN 1815	kV	< 2
PERFORMANCE / PERFORMANCES / TECHNISCHE EIGENSCHAFTEN / CUALIDADES TÉCNICAS / PERFORMANCES / CARATTERISTICHE TECNICHE			
Wet Slip resistance / <i>Anti-glissance à l'humide</i> / Rutschverhalten bei Nässe / <i>Resistencia de deslizamiento en mojado</i> / <i>Antideslizamento condições no molhado</i> / <i>Indice di antiscivolosità con superficie bagnata</i>	DIN 51130	class	R9
Wear resistance / <i>Résistance à l'usure</i> / Verschleißverhalten / <i>Abrasión</i> / <i>Abrasão</i> / <i>Resistenza all'abrasione</i>	EN 660.2	mm <sup>3</sup>	≤ 7.5
Wear group / <i>Groupe d'abrasion</i> / Verschleißgruppe / <i>Grupo de abrasión</i> / <i>Grupo de abrasão</i> / <i>Gruppo di abrasione</i>	EN 649	group	M
Type Binder content / <i>Teneur en agent liant</i> / Bindenmittelgehalt	ISO 10581	type	II
Dimensional stability / <i>Stabilité dimensionnelle</i> / Maßstabilität / <i>Estabilidad dimensional</i> / <i>Estabilidade dimensional</i> / <i>Stabilità dimensionale</i>	EN ISO 2399 (EN 434)	%	Sheet ≤ 0.40 Tile ≤ 0.25
Residual indentation / <i>Poinçonnement statique rémanent</i> / Resteindruck / <i>Punzonamiento</i> / <i>Punçoamento</i> / <i>Impronta</i>	EN ISO 24343-1 (EN 433)	mm	- 0.03
Thermal conductivity / <i>Conductivité thermique</i> / Wärmeleitfähigkeit / <i>Resistencia térmica</i> / <i>Resistência térmica</i> / <i>Resistenza termica</i>	EN ISO 10456 (EN 12524)	W/(m.K)	0.25
Colour fastness / <i>Solidité lumière</i> / Lichtechtheit / <i>Resistencia a la luz</i> / <i>Estabilidade das cores</i> / <i>Solidità alla luce</i>	EN 20 105 - B02	degree	≥ 6
Chemical resistance / <i>Résistance aux produits chimiques</i> / Verhalten gegenüber Chemikalien / <i>Resistencia a los productos químicos</i> / <i>Resistência aos produtos químicos</i> / <i>Resistenza ai prodotti chimici</i>	EN ISO 26987 (EN 423)	-	OK
Anti-bacterial activity / <i>Activité anti-bactérienne</i> / Antibakterielle Aktivität / <i>Actividad antibacteriana</i> / <i>Atividade antibacteriana</i> / <i>Azione antibatterica</i> (E.coli - S.aureus - MRSA) *	ISO 22196	-	>99% inhibits growth
Surface treatment / <i>Traitement de surface</i> / Oberflächenvergütung / <i>Tratamiento de superficie</i> / <i>Tratamento de superfície</i> / <i>Trattamento di superficie</i>	-	-	Evercare™
TVOC after 28 days / <i>TVOC après 28 jours</i> / TVOC (28 Tage) / <i>TVOC (28 días)</i> / <i>TVOC (28 dias)</i> / <i>TVOC (28 giorni)</i>	ISO 16000-6	µg/m <sup>3</sup>	< 10



Notified Body  
n° 1121



- \* The implementation of an effective cleaning method is the best defense against infection
- \* Le respect des protocoles d'entretien des sols est la meilleure garantie contre les infections
- \* Die Umsetzung einer effektiven Reinigungsmethode ist der beste Schutz gegen Infektionen.
- \* La implementación de un efectivo régimen de limpieza es la defensa más importante contra la infección
- \* A implementação de um método de limpeza eficaz é a melhor defesa contra a infeção
- \* L'attuazione di un metodo di pulizia efficace è la migliore difesa contro le infezioni

43, Boulevard Garibaldi - 69170 Tarare - France  
Tel.: +33 4 74 05 40 00 - Fax: +33 4 74 05 06 83  
Email: streamo@gerflor.com  
[www.streamobygerflor.com](http://www.streamobygerflor.com)

**Gerflor**  
the flooring group