




DO NOT ACCEPT COPIES, BUT GO FOR THE ORIGINAL ONLY.

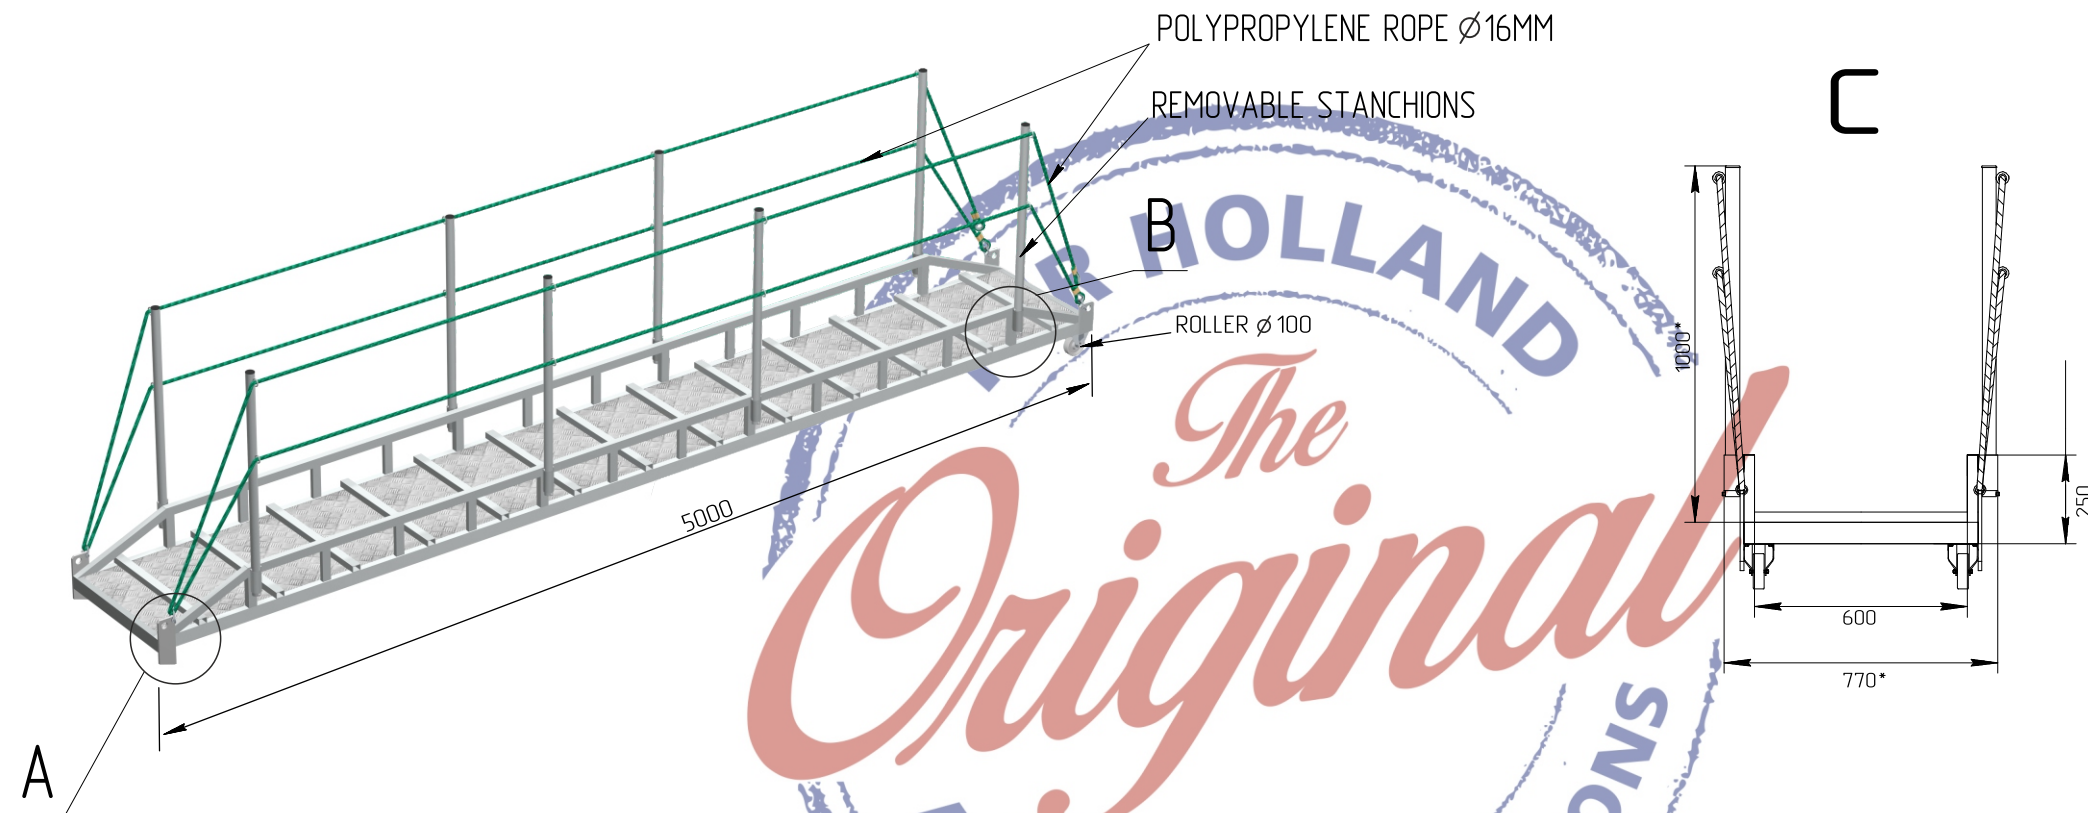

- Minimum and maximum angle of use 0°-30° degrees
- Safe working load 4000 kg/m²=1200 kg

Detail A

B - Stanchion Socket



Produced in Europe

Producer: PTR HOLLAND GROUP	Material: SEAWATER RESISTANT ALUMINIUM
Title Gangway/wharf ladder 5x600	Approval RMRS according: ISO 7061:1993 MSC.1/Circ./1331
Drawing TCA 5x600	Components 1 Ladder body/8 Rem.stanchions with ropes/2Rollers D=100mm



PTR HOLLAND® GROUP
ROTTERDAM - SINGAPORE - HOUSTON - NEWCASTLE - QINGDAO PRC



Weight: 62 kg	Scale: 1:15
Date: 1-Jul-2019	Size: A4
Drawn By: K.Vasin	Units: mm
Drawing number	Rev. Page:
TCA-5,0.00.00	1/1

Property of PTR HOLLAND® GROUP. Reproduction, or disclosure to third parties, in any form whatsoever is not allowed without written consent of the proprietors.