


Wall Mounted Eye Washer (WJH0759C)

Packing list

Please check the quantity of the fittings according to the following lists after unpacking, check whether there is damage transport, if there is any question or qualitative deficiencies, please get in touch with the local franchiser of our company or our company immediately, you will receive the satisfactory reply.

Number	Name	Quantity
1	Eye Wash sprayer head	1 set
2	Eye wash bowl	1 set
3	Main Body	1 set
4	Wall Mounted Bracket	1 set
5	Switch Push Board	1 set

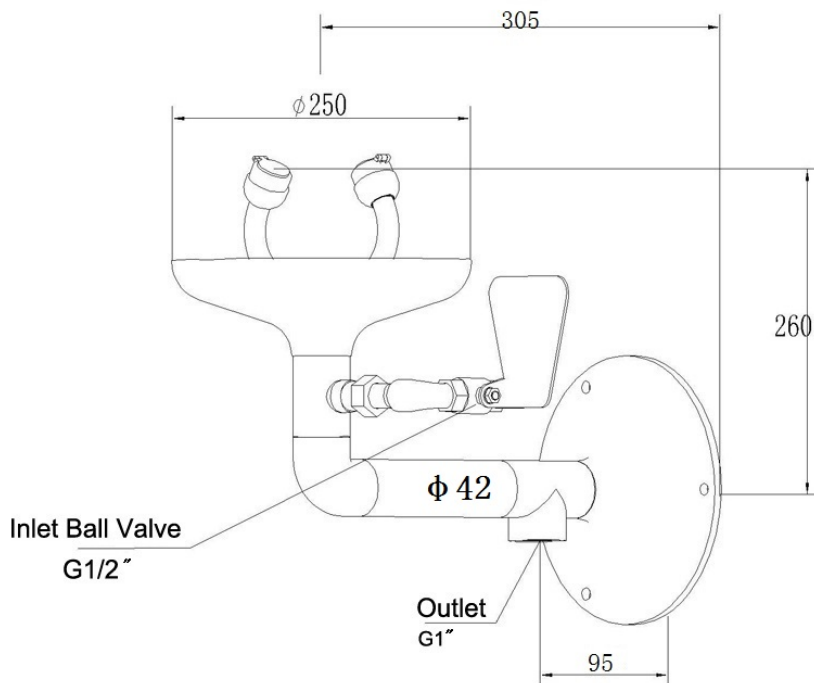

Operation instruction of the Wall Mounted Eye Wash (WJH0759C)

Welcome to use the product, in order to make you get better security protection, please reading this product manual carefully before use this product.

*Using

The emergency eye washer have already been adopted extensively by the most factories and the laboratories of the developed industrial countries of foreign countries, it is the indispensable apparatus of the security and the labors protection. It can make use of reducing the injure of acid, alkali, organic matter and other poisonous corrosive material. It can be extensively apply to petrochemical industry chemical industry, semiconductor industry, medical manufacturing industry, etc.

*Defining for eye wash

As the splash of chemical liquid taking place to staff member's body, face, eyes or the staff members' clothes cause the fire, it is the effective safe protection articles to minimize the dangerous.

*Main performance parameter

Pressure grade MPa			Flux L/min	Applicable condition
Nominal pressure	Sealed pressure	Working pressure	≥11.4	Pure water of normal atmospheric temperature or according with the sanitary standard
0.4	0.45	0.20~0.40		

The choice of the main performance parameter according to ANSI Z358.1-2014, in order to lighten harmful substance to human skin, eyes injury of top layer and simulate when accidents make happened.

*Structure characteristic

1. Making use of the ball valve to control the eye wash. Easy to operate, open and close it fast , it is reliable to close.
2. The flux regulation and control valve can regulate by oneself. (Regulation method can refer to installing and debugging).

*Main material:

1. The material of main body is 304 SUS stainless steel, with gloss epoxy powder surface.
2. Eye wash bowl: bright yellow ABS engineering Plastics