
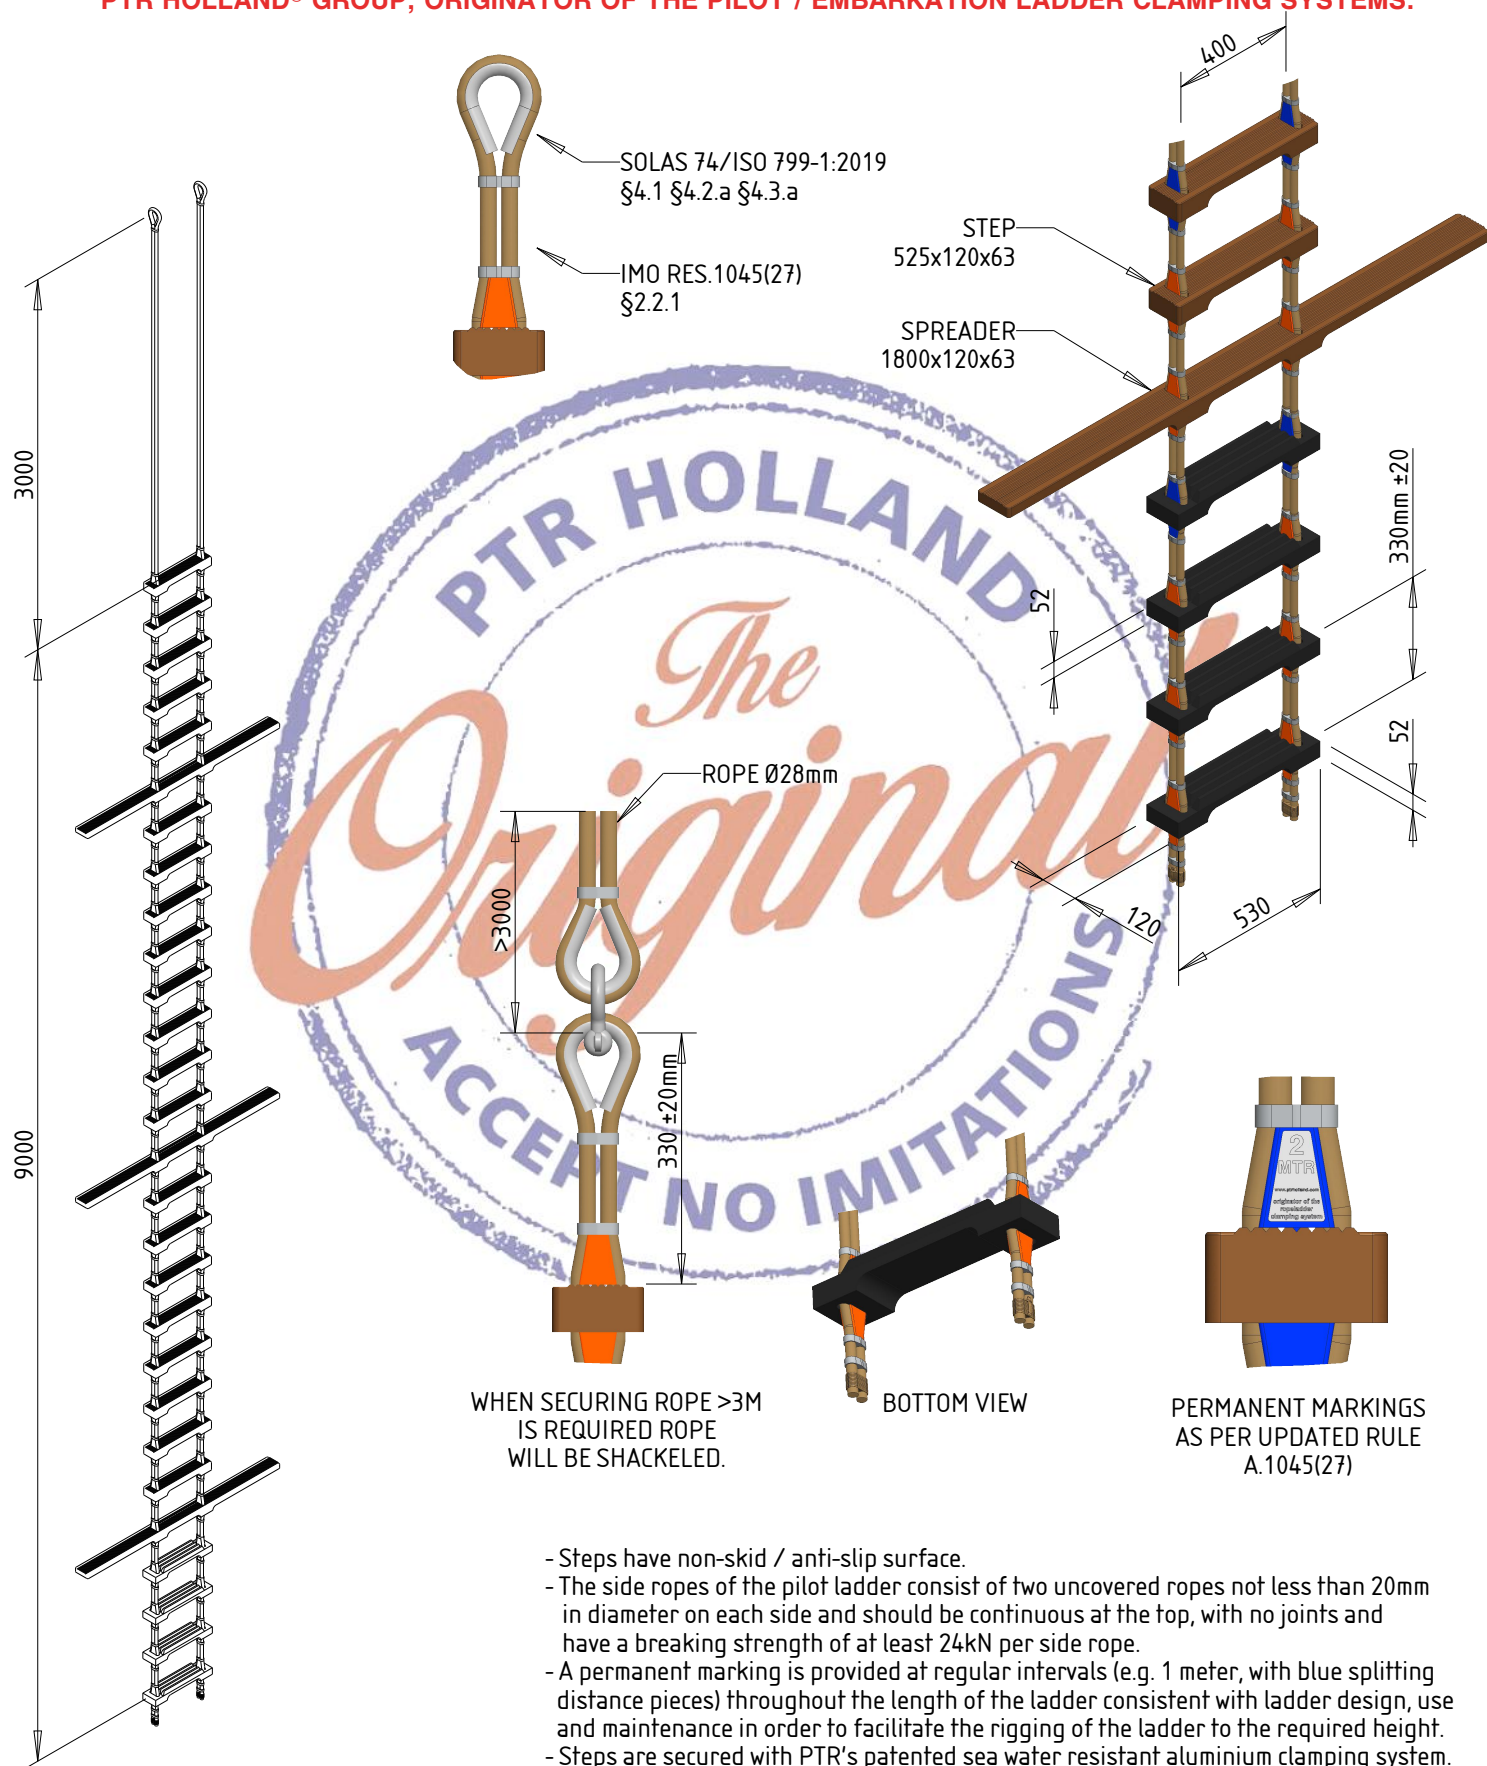




- Steps have non-skid / anti-slip surface.
- The side ropes of the pilot ladder consist of two uncovered ropes not less than 20mm in diameter on each side and should be continuous at the top, with no joints and have a breaking strength of at least 24kN per side rope.
- A permanent marking is provided at regular intervals (e.g. 1 meter, with blue splitting distance pieces) throughout the length of the ladder consistent with ladder design, use and maintenance in order to facilitate the rigging of the ladder to the required height.
- Steps are secured with PTR's patented sea water resistant aluminium clamping system.

Producer:	PTR HOLLAND GROUP	Material:	HARDWOOD			
Title:	NEREUS U.D. PILOT LADDER	Approval:	M.E.D. according ISO 799-1:2019 A.1045(27) SOLAS 74			
Drawing:	NPL9-21-3-4_U.D.	Components:	21 Steps	3 Spreaders	4 Rubber Steps	
 PTR HOLLAND® GROUP ROTTERDAM • SINGAPORE • HOUSTON • NEWCASTLE • PIRAEUS  The mark of responsible forestry FSC FSC® C126587  DNV·GL  MED DNV-GL:0575 <td>Weight:</td> <td>88 kg</td> <td colspan="2">Scale:</td>		Weight:	88 kg	Scale:		
		Date:	21-Oct-2020	Size: A4		
		Drawn By:	BLS-Engineering.com	Units: mm		
		Drawing number:	8-1112-4709	Rev.	Page:	
				-	1 / 1	