

# RESCUE FIRE

**PROTECTING SEAFARERS SINCE 1952** 

2025, RESCUE, LIFE SAVING & FIRE EQUIPMENT

sales@mariteam.dk · www.mariteam.dk

# FIRE, RESCUE & LIFE SAVING

afety at sea is non-negotiable. When an emergency arises, the quality and reliability of your Fire, Rescue & Life Saving Equipment can mean the difference between a controlled situation and a crisis. At MariTeam, we understand the unique challenges of maritime safety, and for over 70 years, we have been a trusted partner for shipowners, operators, and maritime professionals worldwide.

#### A Heritage of Trust and Excellence

Since our founding in 1952, MariTeam has remained an independent and dedicated supplier to the maritime industry. Our commitment has never wavered: we provide high-quality products, expert guidance, and exceptional service to ensure that vessels are equipped with the best life-saving solutions available. We take pride in our ability to adapt to an evolving industry while staying true to the values that have made us a trusted name for decades.

#### Global Reach, Immediate Availability

The maritime industry moves fast, and downtime is costly. We understand the importance of availability and swift delivery, which is why we stock an extensive range of certified fire, rescue, and life-saving equipment at our warehouses—ready to be dispatched at a moment's notice. Our global logistics network allows us to ship directly to ports and distribution hubs worldwide, ensuring that your equipment arrives on time, every time.

#### Trusted Partnerships, Certified Quality

Safety regulations in the maritime industry are stringent, and compliance is essential. That's why we work with industry-leading ma-



# A EQUIPMENT

nufacturers who meet the latest IMO, SOLAS, and other international standards. Our partners share our dedication to safety, reliability, and innovation—ensuring that every piece of equipment we supply has been tested and approved for use in the world's most demanding environments.

#### **Expert Guidance for Complex Requirements**

Selecting the right fire, rescue, and life-saving equipment is not a one-size-fits-all process. Different vessel types, operational conditions, and regulatory frameworks require tailored solutions. At MariTeam, we provide expert consultation to help you choose the best equipment for your specific needs. Whether you need fire suppression systems, personal survival gear, evacuation solutions, or emergency response equipment, we help you navigate the options to ensure full compliance and optimal safety. Additionally, many vessels operate under multiple regulations and standards, making equipment compatibility a challenge. Our team is experienced in custom-built fittings and modifications, ensuring that your ship is fully equipped to meet all necessary requirements without compromise.

#### A Commitment to Safety That Never Ends

At MariTeam, our role doesn't end when the equipment is delivered. We are here for the long haul, supporting you with expert knowledge, ongoing availability, and a commitment to keeping your operations safe. When you choose MariTeam, you're not just purchasing equipment—you're investing in a partnership built on trust, experience, and a shared dedication to safety at sea.

> Stay safe. Stay prepared. Trust MariTeam





CONTENT

Our catalog is printed on 100% recycled paper

LIFE JACKETS	5-8
LIFE JACKETS SPARER PARTS	9-14
IMMERSION SUITS	6-17
FLOATATION GARMENT	
STORAGE BOXES	
PERSONAL RECOVERY DEVICES	
PYROTECHNIC	
LIFEBOAT EQUIPMENT LIST	
LIFEBOAT EQUIPMENT	
LIFERAFT EQUIPMENT	
IMO SIGNAGE	
FIREMAN'S OUTFIT	
FIRE EXTINGUISHERS	
FIRE CABINETS	
LITHIUM EXTINGUISHERS	
FIRE HOSES	
COUPLINGS	
FOG & JET NOZZLES	
EEBD	
SCBA	
FIRE FOAM	
FIRE TESTER	
CO2 LEVEL MEASURING	
PROTECTIVE SUITS	

sales@mariteam.dk · www.mariteam.dk

#### **MERMAN 24**



Part Number: 33025011 ADULT

#### MERMAN 24



Part Number: 33025021 CHILD

## MERMAN 24



Part Number: 33025031 BABY

#### **MERMAN 24 CREW**



Part Number: 33025011 CREW

Tested and approved according to

SOLAS 74, Regulation III/4, III/7.2

and III/34 and IMO 689(17) and MSC-Sirc. 922. Approved according to the

Norwegian Maritime Directorate's

additional requirements of December

**MERMAN 24** is Europe's smallest SOLAS-approved life jacket, ultra-lightweight and space-saving ideal for ships with limited storage. Perfect for merchant and cruise industries, it fits under seats or in deck chests. Available from stock or custom-made with vessel name. Crew versions in Hi-Viz Yellow.

#### REGATTA THERMO CRUISE



Tested and approved according to SOLAS 74, Regulation III/4, III/7.2 and III/34 and IMO 689(17) and MSC-Sirc. 922. Approved according to the Norwegian Maritime Directorate's additional requirements of December 2000

#### REGATTA THERMO CRUISE



Part Number: 4004902-230-CHILD

R

Part Number: 4004902-230-ADULT

### REGATTA THERMO CRUISE



Tested and approved according to SOLAS 74, Regulation III/4, III/7.2 and III/34 and IMO 689(17) and MSC-Sirc. 922. Approved according to the Norwegian Maritime Directorate's additional requirements of December 2000

Part Number: 4004902-230-BABY

# 

2000

Tested and approved according to SOLAS 74, Regulation III/4, III/7.2 and III/34 and IMO 689(17) and MSC-Sirc. 922. Approved according to the Norwegian Maritime Directorate's additional requirements of December 2000

Part Number: 4004902-330-CREW (HI-VIZ YELLOW)

#### SWIFT WATER RESCUE



Part Number: 8673

#### MARISAFE 275 ISO 12402



Part Number: 320201

SEACREWSADER 2010



Part Number: 1143-AUTO

Stylized horseshoe design with offset shoulder straps to alleviate weight and pressure stress on neck and shoulders. 275 Newton single chamber inflatable life jacket. Ideal for general use with foul weather clothing and heavy equipment.

The Swift Water Rescue Jacket is a top

of the range multi-purpose rescue and

emergency response 80N buoyancy

aid. The jacket features pockets and

attachment points so you can easily

store and access your tools and equip-

ment, so you always have the gear at

hand for the job you need to do.

The Seacrewsader 2010 275N Twin Chamber is designed to meet the SOLAS 2010 regulations according to MSC 81(70) as amended by MSC 200(80) and MSC 207(81). Fall arrest and deck harness options

#### REGATTA WORKVEST



Part Number: 4104911-339

#### MARISAFE 275 SOLAS



Part Number: 320200

#### SEACREWSADER **290N 3D WIPE CLEAN**



Part Number: 1146-WCAUTO AUTOMATIC WITH HOOD, 1146-WCAUTOH AUTOMATIC, HARNESS WITH HOOD

#### CREWFIT 275N XD



Part Number: 9251RM RED + MANUAL,

9251NBM BLUE + MAUNAL, 9251RA RED + AUTOMATIC, 9251NBA BLUE + AUTOMATIC, 9251RH RED + HAMMAR, 9251NBH BLUE + HAMMAR

## SEACREWSADER 290N 3D FIRE RETARDANT

#### Part Number:



1146-FRAUTO AUTOMATIC WITH HOOD, 1146-FRAUTOH AUTOMATIC, HARNESS WITH HOOD



Workvest are designed and manufactured at the request of the Norwegian Petroleum Directorate (NPD); basis NS 9360. vests are used for work in exposed situations; deck, offshore installations and maintenance. The used outer fabric was tested in accordance to EN ISO 15025:2000, Procedure A, limited flame spread



#### Double chamber inflatable 275N life jacket / The double chamber gives the security that if one chamber is damaged or fails, the other chamber is sufficient to support the wearer in the water on its own / Zip fastening cover / Harness and crutch strap / Marine grade whistle / SOLAS retroreflective tape / Automatic water-activated SO-LAS light.:

Crewsaver's wipe clean lifejackets are

a suitable choice for those seeking a

durable, easy to clean option for indu-

strial use. Designed for extreme wor-

king environments and appropriate for

abandonment purposes.



## •



CREWFIT 275N XD

The Crewfit 275N XD offers the ultimate in advanced comfort and performance technologies to date. Constructed using a heavy duty 500D cover to maintain longevity of the lifejacket. External indicator window.

Part Number: 9251FRA AUTOMATIC, 9251FRM MANUAL, 9251FRH HAMMAR

#### COMPACT 150 REGULAR



Part Number: 320202

#### COMPACT 275 SUPREME SOLAS - ULTRAFIT



Part Number: 3MYIE6N18

## HI-RISE 150 SOLAS



Part Number: 2MSGA4NM1

Same as Hi-Rise 150 but with Wipe clean PVC reinforced version is ideal for heavy duty industrial use.

MULLI

The Compact 150 Mark II is ideal for general heavy use professional and commercial applications due to its high abrasion resistance outer cover.

The Compact Supreme 275 SOLAS

Heavy Duty Wipe Clean lifejacket is

ideal for offshore extreme use with

foul weather clothing and heavy equip-

ment. The Wipe Clean PVC reinforce-

ment cover is ideal for heavy duty in-

dustrial use and for heavy commercial

fishing applications.

HI-RISE 150

Part Number: 320203

**CREWFIT 150N XD** 

WIPE CLEAN

COMPACT

**150 SUPREME** 



Part Number: 2MSFA4NM1 BLUE/BLACK, 2MSFA4NM1 RED/BLACK

## HI-RISE 275 SOLAS









The Compact Supreme 150 Heavy Duty Wipe clean lifejacket is ideal for heavy commercial fishing applications and also suitable for construction workers. High abrasion resistance fabric reinforced with additional high abrasion resistance 'Tektor' fabric around the sides and lower edges of the cover to prevent damage.

The Crewfit 150N XD delivers advan-

ced comfort and performance with a

modular design offering customizable

covers, inflation, and harness options.

Its wipe-clean cover ensures durability in tough environments, while 500D


fabric shoulder panels provide a comfortable fit. Ideal for continuous use in

demanding conditions.

Part Number: 9251WOM MANUAL + ORANGE, 9251WYM MANUAL + YEL-LOW, 9251WOA AUTOMATIC + ORANGE, 9251WYA AUTOMATIC + YELLOW, 9251WOH HAMMAR + ORANGE, 9251WYH HAMMAR + YELLOW



The HI-Rise 150 is a stylized horseshoe design with a zip closure cover and a double back strap for general offshore use. This lifejacket is dual approved to latest SOLAS 2010 regulations and EN ISO 12402.



#### **HI-RISE 275 SOLAS REGULAR - ULTRAFIT**



Ultrafit horseshoe design 275 Newton double chamber inflatable life jacket. Ideal for heavy duty offshore use with foul weather clothing and heavy equipment

#### Part Number: 2MTSA4NM1 HALKEY ROBERTS, 2MTSE2NM1 HAMMAR

#### MOB1 HI-RISE 275 SOLAS WIPE CLEAN-ULTRAFIT





The MOB1 Hi-Rise 275 SOLAS Wipe Clean is integrated with the Ocean Signal personal locating AIS Man Overboard device RescueMe MOB1. The Wipe Clean PVC reinforced version is ideal for heavy duty industrial use.

Part Number: 2MTTF5NM1 SPRAYHOOD, 2MTTF2NM1 MOB1, 2MTTF3NM1 M100

#### REGATTA AQUASAFE



Regatta AguaSafe Elite is a premium, lightweight inflatable life jacket designed for ultimate comfort and safety. Crafted from durable nylon with a breathable mesh back, it features a 200 cm adjustable belt with a sturdy plastic buckle and SS440 buckle. Equipped with a D-ring for kill-switch, whistle, and belt-keeper to prevent entanglement.

Part Number: 4154808 900 40+ KG BLACK, 4154808 800 40+ KG RED, 4154808 100 40+ KG NAVY

#### **REGATTA SEARESCUE** - HYBRID 225N



Part Number: 4224909

Developed in cooperation with users in the aquaculture industry. Neoprene collar and back panel in venting mesh provide increased comfort. Inspection window for increased safety. The vest also has a strap, extra long belt and space for logo. With light.

Part Number: 4224908

#### HI-RISE 275 SOLAS - ULTRAFIT + FALL ARREST HARNESS



Part Number: 2MU6E0NM1

#### HI-TIDE 275 HEAVY DUTY - ULTRAFIT



Part Number: 3MXUA4NM1

REGATTA PROSAFE



Part Number: 4154903

#### **REGATTE HYBRID** LIFEJACKETS





Ultrafit horseshoe design 275 Newton double chamber inflatable life jacket. Ideal for offshore use with foul weather clothing and heavy equipment



The Hi-Rise 275 SOLAS lifeiacket is also available with the addition of a fall arrest harness. The lifejacket has an attachment system, which can easily be fitted to most fall arrest harnesses. Standard fall arrest harness options available. Other models of fall arrest harness can be considered on request.



Developed in cooperation with users in the aquaculture industry. Lightweight and comfortable. Equipped with neoprene collar, extra long belt and space for logo. Inspection window for increased safety. Crotch strap. With light.

Combines fixed buoyancy elements (55N) with an inflatable bladder (170N), and therefore provides "double protection". The Hybrid 225N is designed for work situations that require good mobility. It has a zipper in the front, a belt around the waist and a welded reflector.

## LIFE JACKETS SPARER PARTS

#### REARMING GAS CYLINDERS



Part Number: 23G CO2:, IT-0011, 33G CO2, IT-0012, 38G CO2:, IT-0013, 60G CO2:, IT-0014



sleeve for 33, 38 and 60 gram CO2 Cylinder



MANUAL/AUTOMATIC BODY A1/M1



MANUAL/AUTOMATIC





#### REARMING KIT, Manual/Automatic Cap A1

The A1 Hammar Inflator activates automatically when submerged and a pressure difference of about 10 cm is reached. The lifejacket will reach full buoyancy within seconds and it is designed to ensure fast and reliable activation even in the most extreme weather conditions. It is important that you don the lifejacket according to the manufacturer's instructions in order to secure the function of the lifejacket and for automatic inflation. SERVICE / MAINTENANCE The Hammar Inflator needs no service or maintenance. Just ensure that the inflator is replaced after the five years expiry date or when the single point indicator is red.



## REARMING KIT COMPLETE, MANUAL/AUTOMATIC CAP A1



## REARMING KIT COMPLETE, MANUAL/AUTOMATIC CAP A1



## LIFE JACKETS SPARER PARTS

#### REARMING KIT COMPLETE, MANUAL/AUTOMATIC CAP MA1EC



Complete re-arming kit for replacing the Hammar MA1 inflator after activation. Includes MA1 cap (125mm cord), cylinder assembly, 33g CO2 cylinder, opening key, and instructions. Verify CO2 cylinder size and pull handle cord length for compatibility.

Part Number: IA-0601-33

#### MANUAL CONVERSION CAP



Part Number: IA-0800

## MANUAL/AUTOMATIC



Kit includes Cord lenght 125mm, Re-Arming Kit, excl. Body/C02 cylinder, MA1 Cap, IA-0605, Opening Key, IT-0002, Rearming Instructions Booklet, IT-0035

Part Number: IA-0600 (Cord

lenght 94 mm)

MANUAL/AUTOMATIC

Product

Specification:

Stops the auto-

matic function while mounted. Fits both A1/M1 and MA1 EC

HAMMAR

CAP MA1 EC

#### REARMING KIT COMPLETE, MANUAL/AUTOMATIC CAP MA1 EC



Part Number: IA-0601-38

replace Hammar MA1 inflator if Life Jacket was activated. MA1 cap (cord length 125mm), Cylinder Assembly, 38gr CO2 Cylinder, Opening Key, Instructions, Match the used inflator's size of CO2 Cylinder and the length of the Manual Pull Handle Cord to confirm correct re-arming kit.

Kit includes all components needed to replace Hammar MA1 inflator if Life Jacket was activated. MA1 cap (cord length 125mm), Cylinder Assembly, 60gr C02 Cylinder, Opening Key, In-

structions. Match the used inflator's

size of CO2 Cylinder and the lenght of the Manual Pull Handle Cord to con-

firm correct re-arming kit.

Kit includes all components needed to

REARMING KIT COMPLETE, MANUAL/AUTOMATIC CAP MA1 EC



Part Number: IA-0601-60

RUBBER BUMPER



Part Number: IA-0900

Protects the MA1 in tough environments from bumps and bruises. Order IA, 0900-10 for 10pcs in a pack

## MANUAL/AUTOMATIC



Part Number: IA-0603

Kit includes Cord lenght 125mm, Re-Arming Kit, excl. Body/C02 cylinder, MA1 Cap, IA-0605, Opening Key, IT-0002, Rearming Instructions Booklet, IT-0035

Part Number: IA-0602



## MANUAL/AUTOMATIC CAP A1

Neoprene protection sleeve for 33, 38 and 60 gram CO2 Cylinder


Part Number: IA-0400 (standard handle)





BETTER SOLUTIONS FOR SAFETY AT SEA

## LIFE JACKETS SPARER PARTS

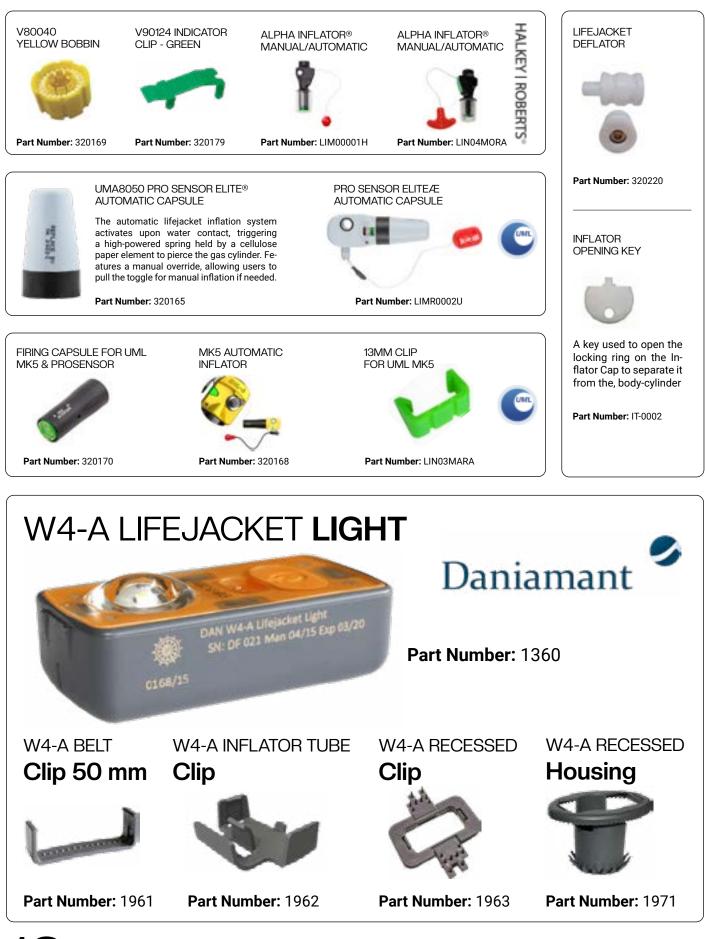

sales@mariteam.dk · www.mariteam.dk

# TRON SA20 PLB PERSONAL LOCATOR BEACON

## EMERGENCY USE ONLY

RLS

(T)

Tron SA20

TEST

RLS

PLB

Tron SA20 PLB is a compact, rugged personal locator beacon for global emergency alerts. Ideal for maritime and land use, it operates on 406/121.5 MHz, features GNSS, RLS, LED/ IR-LED flash, NFC, a mobile app, an 11-year battery, and is water-resistant to 1m for 1 hour.

IOTRON

Part Number: 104500

## LIFE JACKETS SPARER PARTS



**RESCUE EQUIPMENT** 

OUR MAINTINANCE RECOMENDATION

# OUR MAINTINANCE RECOMENDATION

Inspect your lifejacket regularly: Before each use, inspect your lifejacket for anysigns of damage or wear, such as tears, holes, or broken zippers. Make sure allstraps and buckles are in good condition and properly secured.

Follow the manufacturer's instructions: Always follow the manufacturer's instructions for the care and maintenance of your lifejacket. This may include specific instructions for cleaning, storing, and servicing your lifejacket.

Keep your lifejacket clean and dry: After each use, rinse your lifejacket with freshwater and hang it up to dry in a well-ventilated area. Avoid exposing your lifejacket to direct sunlight or heat sources that could cause it to deteriorate. Store your lifejacket properly: When not in use, store your lifejacket in a cool, dry place away from direct sunlight and other heat sources. Make sure your lifejacket is stored in a way that allows it to retain its shape and structure.

Service your lifejacket regularly: According to SOLAS regulations, your lifejacket must be serviced at least once every two years by a certified service technician.

During this service, the technician will inspect and test all components of your lifejacket, including the inflation mechanism, CO2 cylinder, and oral inflation tube.

By following these guidelines, you can help ensure that your lifejacket is always in good working condition and ready to use in the event of an emergency. Remember, a well-maintained lifejacket can be the difference between life and death in adangerous situation.

## **IMMERSION SUITS**

MAS



## Mulli

A 5mm neoprene drysuit designed for thermal protection, providing at least 6 hours of defense against cold water shock and hypothermia. Features a waterproof zipper, hood with Velcro face seal, ankle straps, lifting strop, retro-reflective tape, and neoprene gloves. Available in sizes S-XL.

The Crew Endurance 140N Suit is a

SOLAS MED-approved immersion

suit designed to protect against cold

water exposure. Features a hi-vis buo-

yancy pillow, fire-retardant neoprene

construction, waterproof metal zipper,

lifting strop with stainless steel D-ring,

reflective tape, neoprene face flap,

buddy line, whistle, and ankle adjuster.

Part Number: 1MHZN2YX8 (S, M, L, XL)

#### CREW ENDURANCE 140N



Part Number: 8808-M, 8808-L, 8808-XL

## CHILD IMMERSION SUIT



SOLAS MED-approved Crewsaver immersion suit made from 5mm fire-retardant neoprene for superior insulation and durability. Waterproof with reinforced seams, taped critical areas, and a reinforced foot sole. Supplied in a carry bag with donning instructions. Must be used with an approved lifejacket.

Part Number: 8800-SC, 8800-SHC with Harness

#### REGATTA ACTIVE 911



High-performance flotation suit with an excellent fit. Features detachable suspenders, adjustable belt, Cordura-reinforced seat and knees, neoprene cuffs, and taped seams. Windproof, water-repellent, with ventilation zippers, reflective tape, and fleece-lined pockets. Certified to ISO 12402-5/6 50N and tested to EN ISO 15027-3:2002 for thermal protection.

Part Number: 4504650 133 S, 4504650 133 M, 4504650 133 L, 4504650 133 XL, 4504650 133 XL, 4504650 133 3XL

## Part Number: 8810-M, 8810-L, 8810-XL

CRFW

**ENDURANCE** 

#### CREW ENDURANCE PLUS



A SOLAS MED-approved immersion suit designed for thermal protection and maritime safety. Features a 40mm nylon lifting strop with a stainless steel D-ring, fire-retardant neoprene construction, waterproof zip, reflective tape, integral latex gloves, and an additional over-glove for insulation. Can be unpacked and donned in under 2 minutes.

Part Number: 8800MK2-SHM MEDIUM, 8800MK2-SHU UNIVERSAL, 8800MK2-SHXL XTRA LARGE

## IMPERIAL



The Imperial Immersion Suit, in production since 1969, is a meticulously crafted and pressure-tested survival suit designed for maritime safety. Available in multiple sizes, each suit is supplied in a color-coded storage bag. Approved by USCG, TC, and SOLAS, with MED/SOLAS models available.

Part Number: 904002 ADULT (USCG, SOLAS & TC APPROVED), 904014 ADULT (USCG APPROVED)

## REGATTA SPORTLINE 954



A super lightweight flotation suit designed for superior fit and comfort. Features reinforced knees, double-taped seams, and long leg zippers for easy wear. Durable and reliable for both professional and leisure use. Certified to ISO 12402-5/6 (flotation) and EN ISO 15027-3:2012 (thermal protection).

Part Number: 4504658 930 S, 4504658 930 M, 4504658 930 L, 4504658 930 XL, 4504658 930 XXL



A SOLAS MED-approved crew endurance suit designed for survival in cold water. Provides thermal protection, prevents significant body temperature loss, and aids in rescue. Features a fire-retardant neoprene construction, waterproof metal zipper, lifting strop with stainless steel D-ring, reflective tape, buddy line, whistle, and ankle adjusters.

٩



# MAS III

A 5mm neoprene drysuit designed for thermal protection, providing at least 6 hours of defense against cold water shock and hypothermia. Features a waterproof zipper, hood with Velcro face seal, ankle straps, lifting strop, retro-reflective tape, and neoprene gloves. Available in sizes S–XL.

Part Number: 1MHZN2YX8 (S, M, L, XL)

#### **REGATTA COASTLINE** 953 RED/NAVY



Innovative flotation suit weighing just 1.4kg, making it the lightest on the market. Features a seamless shoulder and chest pocket design to prevent water penetration, underarm ventilation, a durable front zipper, reinforced crotch seams, and slanted leg zippers with Velcro fasteners for easy wear and enhanced durability.

Part Number: 4504651 806 (S-XXXL), 4504651 806 M, 4504651 806 L, 4504651 806 XL, 4504651 806 XXL, 4504651 806 3XL

#### **REGATTA H ARBOUR 106**



A newly developed ISO-approved 50N floatation pant in water-repellent, and durable nylon. For fisherm en, sailors, rib drivers or others who want, the benefits of a floatation-suit, but want flexibility regarding clothing, and, temperature and weather condidions etc. For standalone usage or along, with a floatation-jacket or a simpler leisure/ rain jacket.

Part Number: 4504657 900 S, 4504657 900 M, 4504657 900 L, 4504657 900 XL, 4504657 900 XXL, 4504657 900 3XL

#### REGATTA **FISHERMAN SUIT**



The Regatta Fisherman Suit 50N is a reliable and durable flotation suit, designed to provide safety and comfort during demanding tasks. Featuring robust fabric construction, it offers excellent freedom of movement and insulation. With a buoyancy of 50N, it's an essential companion for professional fishermen.

Part Number: 4504655 334 S, 4504655 334 M, 4504655 334 L, 4504655 334 XL. 4504655 334 XXL

#### AQUAFLOAT SUPERIOR SUIT



Aquafloat Suit is a constant-wear flotation suit, tested to ISO 15027: Class D for 2-hour thermal protection in cold water. Features reinforced knee and seat panels, a high collar with a protective chin strap, and a high-visibility yellow insulated peaked hood with built-in face protection, stowed in the collar. Includes an ID pocket on the chest.

Part Number: 1MHNA2N07 (S, M, L, XL, XXL)

#### **REGATTA COASTLINE** 951 BLACK/ORANGE



A new flotation suit weighing just 1.4kg, making it the lightest on the market. Features a seamless shoulder and chest pocket design to prevent water penetration, underarm ventilation for breathability, a high-quality front zipper, reinforced crotch seams, and slanted leg zippers with Velcro fasteners for durability and ease of use.

Part Number: 4504652 902 S, 4504652 902 M, 4504652 902 L, 4504652 902 XL. 4504652 902 XXL. 4504652 902 3XL

#### REGATTA HARBOUR 906



A high-visibility flotation jacket designed for occupational use, offering built-in buoyancy and protection against hypothermia. Features flame-resistant outer material, ID pocket, VHF fastening, reflective elements, D-ring, whistle, and crotch strap. Certified to EN ISO 20471:2013 (Class 2 for XS, Class 3 for S-3XL).

Part Number: 4504670 339 S, 4504670 339 M, 4504670 339 L, 4504670 339 XL, 4504670 339 XXL, 4504670 339 3XL

#### REGATTA **FISHERMAN PANTS**



Modern fisherman's pants with built-in buoyancy for added safety in demanding work environments. Made from windproof and waterproof PVC-coated polyester for durability and comfort. Designed with input from fishermen to ensure functionality and ease of movement.

Part Number: 4504656 334 S, 4504656 334 M, 4504656 334 L, 4504656 334 XL. 4504656 334 XXL

#### AQUAFLOAT SUPERIOR JACKET



Part Number: 1MMVA2N07 (S, M, L, XL, XXL)



Aquafloat Jacket meets the needs of demanding users, offering superior protection and comfort. Features a high collar with a protective chin strap, a high-visibility yellow insulated peaked hood with built-in face protection (stowed in the collar), and a chest ID pocket for convenience.



Aquafloat Seamaster II high-visibili-

ty yellow flotation jacket for day and night safety. Features a high collar

with a chin strap, insulated peaked

hood with face protection (stowed in

collar), multiple pockets, and chest ID

pocket. Certified to EN 20471.

#### AQUAFLOAT HARNESS JACKET



Aquafloat Harness Jacket is a uni-co-

lor red jacket designed to accommodate an EN ISO 12401 deck safety harness through built-in chest apertures. Available with or without a pre-fitted harness, it includes lifejacket attachment loops on the front chest and back neck for secure integration.

Part Number: 1MMWA2N07 (S-XXXL), 1MMWF0N07 (S-XXXL)

#### AQUAFI OAT SUPERIOR TROUSERS



Aquafloat Trousers are designed for use with the matching jacket to form a fully approved buoyancy aid suit. Features reinforced knee and seat panels, a fully waterproof outer fabric with taped seams, and anti-flushing leg straps with easy-grip pull tabs for a secure fit.

Part Number: 1MQUA2N07 (S-XXXL)

#### NORTH SEA **II - TWO PIECE SUIT**



North Sea II is a two-piece flotation suit offering the same protection as the one-piece version, with added flexibility and comfort. Includes a waterproof jacket and trousers with taped seams, anti-flushing straps on arms and legs, and a foldable hood stored in the neck area.

Part Number: 1MIAA2N07 BLACK/HI-VIS YELLOW

#### X6 TROUSERS



Part Number: 1MMYA2N07 (S-XXXL)



X6 Jacket is designed for extreme conditions, featuring reinforced seat panels for enhanced abrasion resistance. Includes a high collar with a protective chin strap, a high-visibility yellow insulated peaked hood with built-in face protection (stowed in the collar), and a sleeve pocket with an ID pocket and whistle for added safety.

#### SEAMASTER II



Part Number: 1MMXA2N07 (S-XXXL)

#### NORTH SEA (ONE PIECE SUIT)



North Sea One-Piece Flotation Suit, ISO 15027: Class D certified, offers 2 hours of thermal protection in cold water. It features waterproof outer fabric with taped seams, anti-flushing straps on arms/legs, and a foldable hood stored in the neck for extra protection.

Part Number: Part number: 60038225 (S-XXXL) Black/Yellow, 60038226 (S-XXXL) Black/Red

X6 SUIT



Part Number: 1MHSA2N07

#### SMART SOLAS SUIT 1A



Part Number: 1MQVA2N07 (S-XXXL)



X6 Suit is designed for extreme conditions, featuring reinforced knee and seat panels for superior abrasion resistance. Includes a high collar with a protective chin strap, a high-visibility yellow insulated peaked hood with built-in face protection (stowed in the collar), and a sleeve pocket with an ID pocket and whistle for added safety.



X6 Trousers are made for extreme conditions, featuring reinforced knee and seat panels for superior abrasion resistance. Made from fully waterproof fabric with taped seams, they also include anti-flushing leg straps with easy-grip pull tabs for a secure fit.





## SMART THERMAL



A flexible thermal flotation liner designed to be added to the Smart 1A Suit, increasing protection levels to 6 hours when needed. Enhances insulation and buoyancy for improved safety in extreme conditions.

Part Number: 1MC6A2HM5 (S-XXXL)

## URSUIT





The Ursuit Basic is a durable, SO-LAS-approved immersion suit designed for professional use. Made from breathable 4-Tex® fabric, it offers excellent protection, comfort, and visibility in demanding maritime conditions. Includes gloves, hood, and storage bag.

#### SMART SOLAS SUIT 2A



Part Number: 1MG4A2N07 (S-XXXL)

RDS BLACK



Part Number: RDS BLACK (S-XXL



Specialized RDS Rapid Donning Suit for the offshore industry. Dual-approved to ETSO and SOLAS standards. Made from breathable, flame-resistant Gore-Tex Nomex. Features a detachable Outlast liner for temperature regulation and an open-neck design for quick donning and doffing.

Smart SOLAS Suit 1A is a semi-dry suit with full SOLAS approval for immersi-

on and anti-exposure. Offers flexibility

for work and at least 1-hour thermal protection against cold water shock.

Exceeds SOLAS buoyancy requirements and is compatible with Mullion SOLAS Hi-Rise 275N lifejackets.

RDS



Part Number: RDS WE (S-XXL)

A robust yet comfortable dry suit designed for demanding all-round use. Features an open-collar structure for quick donning and doffing, breathable and waterproof Gore-Tex fabric, heat-sealed taped seams, Cordura reinforcements on knees and back, and polyurethane boots with non-slip so-

les.

SEA HORSE SAR



Part Number: SEA HORSE SAR (S-XXL)



A durable yet comfortable dry suit designed for all-round use. Features an open-collar structure for quick donning and doffing, Gore-Tex® fabric with an ePTFE membrane for breathability and waterproof protection, and reinforced double-seam construction with heat-sealed taped seams for 100% waterproof performance.



An ultra-lightweight dry suit designed to be worn under normal clothing. Made from breathable Gore-Tex® to keep underlayers dry, even with non-breathable outerwear. Features double-seam construction, heat-sealed taped seams, integrated socks, and 2.5mm neoprene neck and wrist seals. Weighs under 1kg (size L).

Part Number: 1MHSA2N07 (S-XXXL)

#### HORIZON DRYSUIT

OTS MID-LAYER

**IMMERSION SUIT** 



Part Number: 6580 (S-XL)

#### 1000 SERIES COASTGUARD PASSENGER SUIT



Part Number: Ask us for details



Horizon drysuit with 3-layer breathable, waterproof technology. Features a twin neck seal system, latex wrist seals, fabric socks, and an adjustable waistband. Stretch mesh back panel, adjustable braces, and pre-articulated arms and legs for flexibility. Cordura-reinforced seat and knees for durability.



A top-quality immersion suit designed for the most demanding users. Features a superior ergonomic fit, a comfortable telescopic waist construction, and Gore-Tex® fabric with an ePTFE membrane for breathability and complete waterproof protection. Ensures dryness and performance in all conditions.

#### MPS -**MULTI PURPOSE SUIT**



High-performance immersion suit for heavy professional use, trusted by defense forces, border guards, and sea rescue teams. Features a durable rubber exterior, super-stretch neoprene wrist seals, and enhanced warmth. Includes storage bag, neoprene gloves, hood, and beanie.

Atacama Pro drysuit designed for

maximum dryness, comfort, and fle-

xibility. Features 3-layer breathable

technology, front-entry Aquaseal zip,

articulated arms and legs, adjustable

braces, and a stretch mesh back pa-

nel. Cordura-reinforced seat and kne-

es for durability.

#### Part Number: MPS (S-XXL)

#### ATACAMA **PRO DRYSUIT**



Part Number: 6556 (S-XL)

#### SEA HORSE **ORANGE, BLACK, GREEN**





Specialized RDS Rapid Donning Suit for the offshore industry. Made from breathable, waterproof Gore-Tex® with an ePTFE membrane. Open-collar design for easy donning and ventilation. Reinforced double-seam construction with heat-sealed taped seams for full watertight protection.

Part Number: SEA HORSE RED, BLACK GREEN (S-XXL)

## STORAGE BOXES

Versatile Storage Solutions for Lifejackets, Equipment, and More. Ideal for storing lifejackets, safety gear, and a wide range of equipment, these robust boxes offer durable and customizable storage options for maritime, offshore, and windmill applications.

Model	Length (mm)	Height (mm)	Width (mm)	Weight
MPC 6	800	300	700	10 Kg
MPC 7	1220	400	660	20 Kg
MPC 8	1220	450	690	20 Kg
MPC 8R	1220	450/850*	690	25 Kg
MPC 9	1680	450	690	25 Kg
MPC 9R	1680	450/850*	690	35 Kg
MPC 5	2215	450	690	42 Kg
MPC 5H	2215	700	690	50 Kg
MPC 5R	2215	450/850*	690	45 Kg
MPC 5P	2715	450	695	48 Kg
MPC 5PR	2715	450/850*	695	52 Kg
MPC-8D	860	600	400	15 Kg

Height is specified respectively without and with backrest

#### **KEY FEATURES:**

- Robust Construction: Made with approximately 6 mm thick reinforced material for extra durability and stability.
- Corrosion-Resistant Fittings: All hinges and fittings are manufactured from high-quality stainless steel, ensuring long-lasting performance in harsh environments.
- Flexible Design Options: Available in 9 different sizes, with the choice of models featuring integrated backrests (model numbers ending with R).
- Multi-Purpose Storage: While designed primarily for lifejackets and safety equipment, these boxes are highly versatile and can be used for storing a variety of tools, supplies, and technical gear.
- Customizable Colors: Choose the color that best fits your vessel, installation, or company branding.
- Personalized Design: We can add any text, logo, or graphic you require, allowing you to fully
  customize the appearance to match your brand or operational needs



#### **GRP PRODUCTS**

#### LIFE JACKET CHEST - SOS506



Part Number: SOS506

#### LIFE JACKET CHEST


#### - SOS516



Part Number: SOS516

#### FIREFIGHTING EQUIPMENT CHEST

#### - SOS505



Chest ensures secure, weather-resistant storage for marine firefighting gear. Made from UV-stabilised polyethylene, it features stainless steel fittings and bungee-secured lid, offering reliable protection in harsh conditions.

LIFE JACKET CHEST - SOS510

dire

JoBird SOS506 Life Jacket Chest pro-

vides secure, weather-resistant stora-

ge for up to 10 foam-filled lifejackets

or immersion suits. Constructed from

UV-stabilised polyethylene, it features

a marine-grade bungee-secured lid

for rapid access and an IP56 rating,

ensuring durability in harsh marine en-

JoBird SOS516 Life Jacket Cabinet

provides durable, weather-resistant storage for approximately 26 foam-fil-

led life jackets or fewer immersion

suits, depending on model. Designed

for offshore environments, it ensures

reliable protection and accessibility in

harsh marine conditions.

vironments.



Part Number: SOS510

#### FIRE EQUIPMENT LOCKER - RS450FF Type B



Part Number: RS450FF Type B



JoBird SOS510 Life Jacket Chest offers secure, weatherproof storage for up to 14 adult life jackets. Constructed from durable, UV-stable GRP, it features a hinged lid and freestanding design, ensuring longevity in marine environments.



#### JoBird RS450FF Type B Fire Equipment Locker is engineered for naval applications, providing secure storage for firefighting gear. Confrom Lloyd's-approved, structed UV-resistant composites, it features an IP56-rated enclosure and a durable aluminum roller shutter for confined spaces.

#### EMERGENCY EQUIPMENT CABINET - **JB20EE**



Part Number: JB20EE



#### JoBird JB20EE Emergency Equipment Cabinet provides secure, weatherproof storage for critical safety gear. Made from Lloyd's-approved GRP with

stainless steel fittings, it ensures durability, rapid access, and protection in demanding marine environments.

FIRST AID LOCKER - RS450FF Type A

Part Number: SOS505




Part Number: RS450FF Type A

JoBird RS450FF Type A First Aid Locker offers secure, weather-resistant storage for medical equipment in marine environments. Constructed from Lloyd's-approved GRP with stainless steel fittings, it features a space-saving roller shutter door and IP56-rated protection.

#### DAMAGE CONTROL LOCKER - RS450DC



Part Number: RS450DC







## PERSONAL RECOVERY DEVICES

#### 30-INCH 2.5KG ORANGE LIFE BOUY CAN BE USED AT SEA OR FROM SHORE



30" 2.5 kg lifebuoy is made with polyurethane foam and an HDPE F600 cover. Features SOLAS retroreflective tape for high visibility. Withstands a 100m drop height. Inner/outer diameter: 440/720 mm.

Self adhesive stickers featuring the

vessel's name and home port. Our

stickers, are expertly designed to fol-

low the concave features from the life

bouy and, crafted to meet the harsh evironmental requirements., Letter

Lifeline in plastic tube, which fits in

MariTeam lifebuoys. Material: UV

resistant polyethylene Dimensions:

480x130x80mm. Rope: Ø 8 mm,

length 30 m. Breaking Load: 500 kg. Compliance with SOLAS requirements

height: 30-60 mm

Part Number: 330158

#### LIFE BOUY NAME STICKER



Part Number: TEXT

#### 8MM LIFEBOUY LINE IN PLASTIC CONTAINER



Part Number: 330168

#### MANOVERBOARD Mk9



Part Number: 9537800

The Pains Wessex Manoverboard MK9 Compact Lifebuoy Marker features a self-activated LED lighting system that exceeds SOLAS requirements, offering a minimum light output of 2 candela for over 2 hours and producing dense orange smoke for 15 minutes.

Part Number: 330159

**30-INCH 4KG ORANGE LIFE BOUY** 


CAN BE USED AT SEA OR FROM SHORE

#### STAINLESS STEEL BRACKET FOR 30" LIFE BOUY



Part Number: 330167

SOLAS REFLECTIVE TAPE



Part Number: 330189

#### HM-0600 LIFEBUOY **RELEASE SYSTEM MK II**



Part Number: HM-0600

30" 4.3 kg lifebuoy is made with polyurethane foam and an HDPE F600 cover. Equipped with SOLAS retroreflective tape for visibility. Withstands a 100m drop height. Inner/outer diameter: 440/720 m

Stainless steel bracket designed for

securely mounting a 30" lifebuoy. Du-

rable and corrosion-resistant, it ensu-

res reliable storage and quick access in emergency situations. Ideal for ma-

The reflective tape is intended for re-

flectorizing SOLAS life suport equip-

and life rafts. Roll size: 50mm x 45,7 m

rine and industrial applications.



Complete package for electric/water release includes: GRP holder with metal holder, ERU with pre-installed cord, 1.5m cable, release switch (IP66, silky grey), connector box (IP66, steel grey), 20m grey cable (2x0.75mm), manual safety pin, pilot line, and installation/ user guide. Other lengths available.

sales@mariteam.dk · www.mariteam.dk

## PERSONAL RECOVERY DEVICES

#### HM-0601 LIFEBUOY RELEASE SYSTEM MK II



Part Number: HM-0601

#### HM-0610 LIFEBUOY RELEASE SYSTEM MK II



Part Number: HM-0610

HM-0630 REPLACEMENT

KIT LIFE BUOY SYSTEM MKII

## HAMMAR

Package for electric/water release (without cable and connector box) includes: GRP holder with metal holder, ERU with pre-installed cord, 1.5m cable, release switch (IP66, silky grey), manual safety pin, pilot line, and installation/user guide. If mounted outside, use a protective enclosure. Max cable diameter: 12mm.

HAMMAR

HAMMAR

Included in the kit:, One GRP holder with pre-installed metal holder., One manual safety pin in stainless steel, One pilot line for loading the lifebuoy, Installation manual and user guide

Lifebuoy Release, electric/water acti-

vation. ERU electric/water activation

with release cord and installation ma-

nual in English. The ERU shall be chan-

ged every two years in order to have the same service interval as liferafts

and EPIRBs.

HM-0605 LIFEBUOY RELEASE SYSTEM MK II



Part Number: HM-0605

HM-0615 GRP HOLDER MKII



Part Number: HM-0615

#### HM-0650 LIFEBUOY RELEASE SYSTEM, VACUUM



Part Number: HM-0650

#### HM-0406 REPLACEMENT KIT LIFEBUOY SYSTEM MK I



Part Number: HM-0406



Complete package for electric/water release with flush mount Release Button includes: GRP holder with metal holder, ERU with pre-installed cord, 1.5m cable, Release Switch with push button and electronic switch module, connector box (IP66, steel grey), 20m grey cable (2x0.75mm), manual safety pin, pilot line, and installation/user guide. Other lengths available.

#### HAMMAR

With pre-install metal holder and bracket, Included in the kit:, One GRP holder with pre-installed metal holder.

## HAMMAR

Included in the kit:, One GRP holder with pre-installed metal holder. One MRU (Manual Release Unit) with cord pre-installed on the metal holder., One Vacuum Pump, One U-Console, 30 meters Stainless Steel Tubing, One manual safety pin in stainless steel, One pilot line for loading the lifebuoy, Installation manual, user guide and test of the LifeBuoy.

## HAMMAR

With release cord, pilot line, metal ring, cable tie and installation manual in English. Note: For LifeBuoy Systems supplied until spring 2010. Product Specification: ERU electric/water activation. Breaking Strength: Cord sling: minimum 6 kN. Release Depth: 1,5 - 4 m

## õV/

Part Number: HM-0630

#### HM-0660 REPLACEMENT KIT LIFEBUOY RELEASE SYSTEM MKII



Part Number: HM-0660

The Hammar H20 Hydrostatic Release Unit (HM-0660) is a trusted choice for enhanced safety at sea. Designed for life rafts and EPIRBs, this reliable unit automatically activates when submerged, ensuring rapid deployment. Built with corrosion-resistant materials, it delivers consistent performance in harsh marine conditions.

## 

## PERSONAL RECOVERY DEVICES

#### DAN L90 LED



The L90 operates on five alkaline batteries, providing a one-year lifespan. Robust and reliable, it activates automatically upon release. Exceeds IMO SOLAS regulations with a minimum 2CD output and a minimum 2-hour duration.

Part Number: 63-400A WITH BATTERIES, NO BRACKET, 63-401A WITHOUT BATTERIES, NO BRACKET, 63-4003 BRACKET

#### DAN L160



Part Number: 62-001A

DAN L160 is a SOLAS-approved lifebuoy light designed for marine safety. Featuring automatic activation upon water contact, it provides high-intensity illumination for reliable visibility in emergency situations. Compact, durable, and easy to install, it ensures compliance with safety regulations.

#### **DAN L161**



Part Number: 62-002A

DAN L161 is a SOLAS-approved lifebuoy light designed for marine safety. It provides a minimum 2CD output with a 2-hour duration and activates automatically upon water contact. Maintenance-free with a 5-year lifespan, it is compact, easy to install, and exempt from Class 9 transport requirements.

#### **DAN L162**



Part Number: 62-003A

DAN L162 is a SOLAS-approved lifebuoy light designed for marine safety. It provides a minimum 2CD output with a 2-hour duration and activates automatically upon water contact. Maintenance-free with a 5-year lifespan, it is compact, easy to install, and exempt from Class 9 transport requirements.

#### **DAN L163**



Part Number: 62-004A

The Daniamant L163 is the only US-CG-approved intrinsically safe lifebuoy light with UL913 certification for Class 1 hazardous locations (Groups A, B, C & D) and ANSI/UL1196 compliance. It meets IMO SOLAS standards (2CD output, 2-hour duration) and USCG requirements with a 15-hour duration. SOLAS/MED & USCG approved, ATEX/IECEx certified, 5-year life, compact size, easy fitting, and exempt from Class 9 transport requirements.

#### DAN L170



Part Number: 61-001A WITH COMMERCIAL BRACKET The L170 is available in two versions: a commercial version and a leisure version with a unique bracket for easy lifebuoy mounting. Both are fully SOLAS approved and differ only in the supplied bracket. 5-year life, no maintenance, suitable for commercial and leisure use, compact and robust design.



# PERSONAL RECOVERY

Safety at sea starts long before an emergency. With the right Personal Recovery Devices, every vessel is prepared to respond swiftly and effectively when it matters most. At MariTeam, we provide proven solutions that turn critical moments into life-saving outcomes—because every second counts, and every life matters.

## PYROTECHNIC

#### RED Handflare Mk8



Part Number: 9529000

#### PARA RED Rocket Mk8A



Part Number: 9506720

#### LARGE Polybottle



Part Number: 9569000

Patronage -

Pains Wessex Red hand-held distress signal is designed for short-range use to pinpoint location by day or night. It burns brightly for 60 seconds at an intensity of 15,000 candela. The flare features a unique telescopic handle, making it compact and space-saving when stored in a liferaft or lifeboat. The handle is easily extended, and the flare is activated using a pull-wire mechanism.

ditions, it maintains performance relia-

The Pains Wessex Large Polybottle is a

robust and reliable storage solution for marine safety equipment. Built with du-

rable, high-quality materials, it provides

exceptional protection against harsh

maritime environments. Its secure, wa-

tertight seal ensures your safety gear

stays dry and ready for use when ne-

eded.

bility even after immersion in water.



#### WHITE Handflare Mk8



Part Number: 9527510

## LIFESMOKE



## MANOVERBOARD



Part Number: 9537800




The Pains Wessex Manoverboard MK9 Compact Lifebuoy Marker features a self-activated LED lighting system that exceeds SOLAS requirements, offering a minimum light output of 2 candela for over 2 hours and producing dense orange smoke for 15 minutes.

LINETHROWER 250 LINETHROWER 250 The Pains Wessex Linethrower 250 is a self-contained line-throwing ap-- Complete Body and Line ONLY pliance designed for maritime use. It The Linethrower 250 (Body and consists of a durable plastic case with Line ONLY) is a self-contained an end cap, 250 meters of line, an inteline-throwing appliance desiggral striker mechanism, and a rocket. ned for maritime and land use. Part Number: 9500800 It consists of a plastic launcher equipped with 250 meters of 4mm diameter line. Part Number: 9500700 LINETHROWER 250 Rocket The Pains Wessex Replacement Rocket PainsWessex is specifically designed for use with the Linethrower 250 Body and Line container. Part Number: 9502000

# 28

sales@mariteam.dk · www.mariteam.dk





/lk8



a compact and reliable distress signal device that features a fully extendable handle for ease of use and safety. The flare emits a bright white light, making it ideal for signaling in low-visibility conditions or during emergencies.

The Pains Wessex Lifesmoke MK9 is

a compact, flat-top, daytime distress

signal designed for ease of handling

and safety. It is intended for effective

position marking during rescue ope-

rations and can also be used to indi-

cate wind direction. The device emits

dense orange smoke for a minimum duration of 3 minutes, making it highly visible in daylight conditions.

The White Handflare Mk8 is designed

for use in both day and night situations

to provide short-range collision warning and illuminate small areas. It is




# LIFE BOAT EQUIPMENT LIST

Our catalogue is designed to provide you with all the necessary information about lifeboat equipment, as required by the SOLAS regulations. According to SOLAS, all lifeboat equipment must be secured within the lifeboat by lashings, storage in lockers or compartments, storage in brackets or similar mounting arrangements, or other suitable means. This is to ensure that the equipment is readily available and easily accessible during an emergency. The equipment must also be packed in a suitable and compact form, and should not interfere with any abandonment procedures. In addition, all items of lifeboat equipment should be as small and of as little mass as possible. Below I you'll find a list of all the mandatory life boat equipment required by SOLAS regulations. For some equipment we have more than one solution. Besides the madatory equipment we have a range of other life boat and life raft equpment of the following pages.

- 1. ANTI-SEASICKNESS TABLETS
- 2. BOATHOOK TELESCOPIC & BOATHOOK WOODEN SHAFT
- 3. BUOYANT BAILER NON CORROSIVE
- 4A. BUCKET GALVANIZED
- 4B. BUCKET RUBBER
- 5. BUOYANT RESCUE QUOITS
- 6. LIFESMOKE MK9
- 7. DAYLIGHT SIGNALLING MIRROR
- 8. EMERGENCY DRINKING WATER 5X100ML IN BAG
- 9. EMERGENCY SURVIVAL RATIONS
- 10 A. CATEGORY C FIRST AID KIT
- 10 B. SOLAS LIFERAFT/LIFEBOAT FIRST AID KIT
- 11. LIFEBOAT COMPASS
- 12. FLOATING KNIFE
- 13. RED HANDFLARE MK8
- 14. HATCHET FOR LIFEBOAT
- 15. JACK KNIFE
- 16. LIFE SAVING SIGNALS (DOUBLE-SIDED)
- 17. HANDPUMP FOR LIFEBOAT
- 18 A. CRUTCH FOR LIFEBOAT

- 18 B. OAR FOR ROWING LIFEBOAT
- 18 C. OAR BOUYANT FOR LIFEBOAT
- 19. FIRE EXTINGUISHER 2KG ABC DRY POWDER
- 20 A. INFLATABLE RADAR REFLECTOR
- 20 B. RADAR REFLECTOR
- 21. PARA RED ROCKET MK8A
- 22. RUSTPROOF DIPPER WITH LANYARD
- 23. GRADUATED DRINKING VESSEL
- 24. SEA ANCHOR WITH HAWSER
- 25. SEARCH LIGHT
- 26. FISHING TACKLE
- 27. SURVIVAL GUIDE BOOK
- 28. LIFEBOAT SPONGE
- 29. TINOPENER FOR LIFEBOAT
- 30. LIFEBOAT TOOLKIT
- 31. THERMAL PROTECTIVE AID
- 32. WATERPROOF TORCH WITH SPARE BULB AND BATTERIES - SOLAS
- **33.** MARINE GRADE WHISTLE

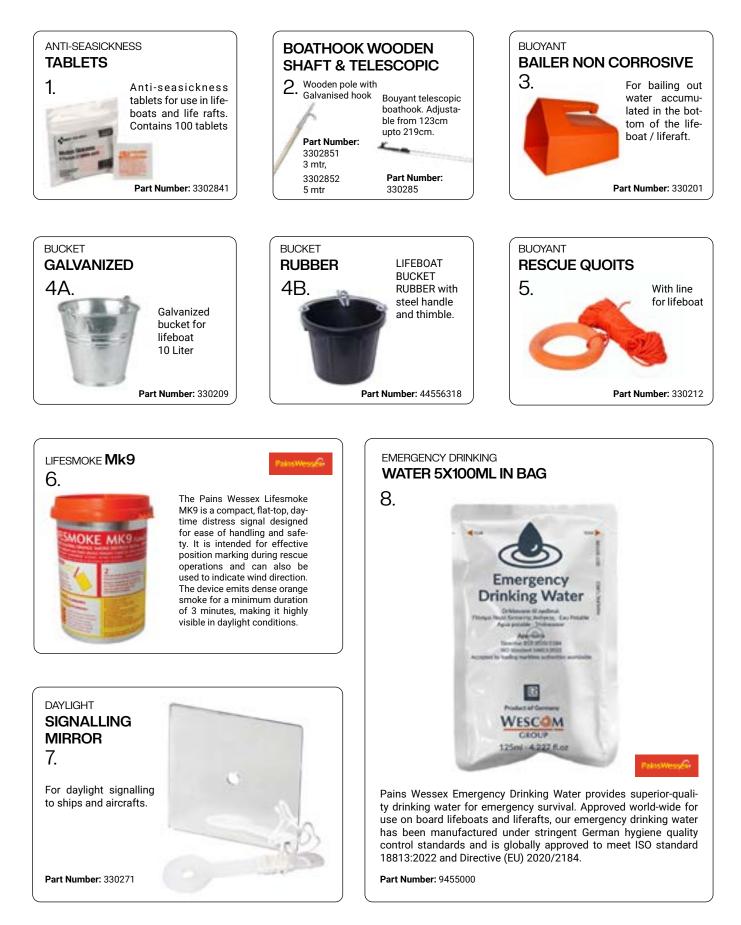

# 30

sales@mariteam.dk · www.mariteam.dk

#### EMERGENCY SURVIVAL RATIONS



9. Pains Wessex Emergency Rations provide high-energy food for emergency survival. Approved world-wide for use on board lifeboats and liferafts, our compact emergency rations have been developed to offer the highest quality rations manufactured under stringent German quality control standards.

#### SOLAS LIFERAFT/LIFEBOAT **FIRST AID KIT**



Part Number: 03365-ANP

10B. This kit is Lloyds' Register of Shipping Approved for use in lifeboats and liferafts used on ships registered outside the EU, this kit is highly recommended for all vessels, regardless of the voyage's purpose or duration.



CATEGORY C

**FIRST AID KIT** 

## 10A.

Designed to meet the stringent maritime regulations, set by the UK Maritime and Coastguard Agency (MCA) MSN 1905, the ANP MCA Category C First Aid Kit is a must-have for all lifeboats and liferafts.

Part Number: 00585-ANP

#### LIFEBOAT COMPASS





#### 11.

Elegant and modern compass with multidirectional bracket. For better installation on any horizontal, ceiling or vertical surface. Card size: 85 mm. Card style: Conical. Card scale: Every 5.0 degrees Lighting: 12 V. Warranty: 5 years. Aprroved: MED

Part Number: 330286



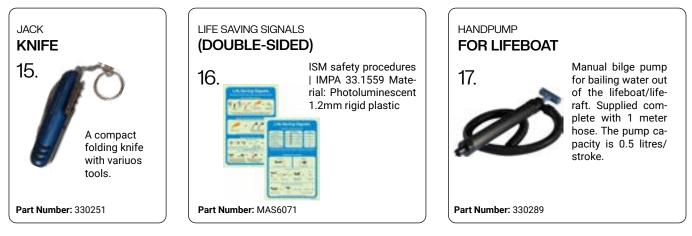

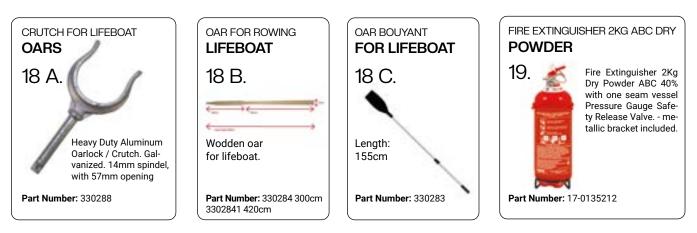

RADAR

20 B.

REFLECTOR

Part Number: 330190

#### INFLATABLE **RADAR REFLECTOR**



Mounted on life raft to enhance reflection from radar radiation. Made from, a high density polymer, the outer inflated balloon contains a radar reflective, metallic mesh assembly. Conforms to the latest international standards, such, as IMO MSC.164(78) and ISO8729-1:2010. Diameter (inflated): 460mm, SPL (RCS): =7.5m2 (X band). Max Storage Time: Five years.

The Pains Wessex Para Red MK8A

Rocket is a long-range distress signal

designed to conform to SOLAS 74/88 regulations as amended. Built to withstand extreme environmental conditions, it maintains performance reliability even after immersion in water.

Radar reflector compes of 12 anodized aluminium plates with core and caps, made of plastic materials resistant to the UV rays. For reflecting radar signals, back to their source. Used to inform a position to rescue squads while at open, sea. It is recommended to install it at a height of at least 3,5metres above the, sea level.

Part Number: 330191


**Rocket Mk8A** 


Part Number: 9506720

PARA RED

21.

## RUSTPROOF DIPPER WITH LANYARD 22. Part Number: 330210



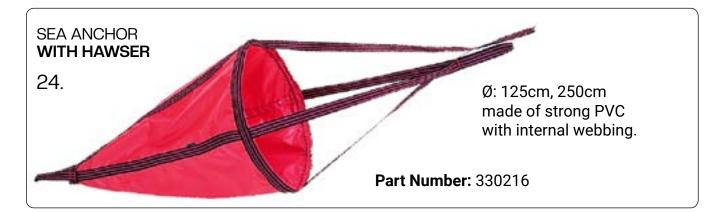



## LIFEBOAT POLYESTER



Part Number: 44555218

#### TEAR-AID **TYPE B**



Part Number: 331404

## MEMBRANE HANDPUMP



Part Number: 330272

## LIFEBOAT SEATBELT 3-POINT ADJUSTABLE



Part Number: 3314023 - BLUE 3314023 - ORANGE

## 34

## STORAGE CONTAINER

In this repairset you will find all the ne-

cessary material to strengthen, stop-up

and, repair polyester equipment., This set contains:, Polyester resin 250 ml,

Hardener 10ml, Glass-sheeting for stiffness, Glass tissue for strength, Mixing

cup, Mixing spoon, Brush, Gloves




Part Number: 331317 6 liter, 331318 12 liter, 331319 26 liter

## LIFEBOAT WINDPROOF



Part Number: Storm Match

#### LIFEBOAT SEATBELT 4-POINT ADJUSTABLE



Part Number: 3314021 - BLUE 3314021 - ORANGE

## WOODEN PLUG



Part Number: 44556171 hole diam. 1", 44556172 hole diam. 1 1/2", 44556173 hole diam. 2", 44556174 hole diam. 2 1/2", 44556175 hole diam. 3", 44556176 hole diam. 4", 44556177 hole diam. 5"

#### DITTY BAG FOR LIFEBOAT



Part Number: 320159

## FPD LIFEBOAT FALL **PREVENTER DEVICE**



Part Number: 331402

## WATERPROOF



Part Number: 331405

#### LIFEBOAT STATIC SEATBELT 2-POINT.



Part Number: 3314026 - BLUE 3314025 - ORANGE

### LIFERAFT EQUIPMENT

#### HAMMAR



Part Number: 330294

EASY

RELEASE

LIFERAFT STRAP

Cradle Webbing Strap for Adjustable Leisure Liferaft Cradle. This innovative webbing kit is fully adjustable and gives a quick release solution. At the, same time, it provides the basis for hydrostatic release integration with the standard, universal cradle.

#### MANUAL EASY RELEASE HOOK



Part Number: HR-0520

The Hammar Easy Release manual release hook, only manual, is strong and can withstand 15kN lashing load. It is easy to release, even under high lashing load and with only one hand. Can be used in installations where float free arrangement is not required. This Easy Release model do not need

float free arrangement is not required. This Easy Release model do not need a Hammar H20 for the installation. Product Specification: Only manual, max working load 15 kN

SAFETY PIN-PULL-RELEASE

under. The 0520

## Safety Pin TO EASY RELEASE





Part Number: HR-0500

## H20 STANDARD SOLAS **MODEL (YELLOW)**



Part Number: HR-0100

## HAMMAR

THE HAMMAR EASY RELEASE MANU-AL RELEASE HOOK IS STRONG and, can withstand 15kN lashing load. It is easy to release, even under high lashing, load and with only one hand. THe Hammar Easy Release fits all H20 raft, models. Longer connection wire to the lashing is available upon request. Manual Release Hook, stainless steel, max working load 15 kN, Weight:0.2kg

This model is designed for liferafts

from 6 up to 150 persons. English top

label. Supplied in a box with step-by-

step mounting instruction for the lifer-

aft container. Approvals: EC approved

Breaking Strength: White rope sling:

minimum 15 kN, Weak link: 2,2 +/- 0,4

kN according to SOLAS regulations

Release Depth: 1,5 - 4 m

HAMMAR H20 STANDARD



Part Number: HR-0102

Part Number: HR-0501



This model is designed for liferafts from 6 up to 150 persons. USCG approved., English top label. Supplied in a box with step-by-step mounting instruction, for the liferaft container., Approvals: USCG/EC approved, Breaking Strength: White rope sling: minimum 15 kN, Weak link: 2,2 +/- 0,4, kN according to SOLAS regulations, Release Depth: 1,5 - 4 m



#### H20 STANDARD SOLAS MODEL (YELLOW)

This model is designed for liferafts from 6 up to 150 persons. USCG approved., English top label. Supplied in a box with step-by-step mounting instruction, for the liferaft container., Approvals: Canada TC/EC approved, Breaking Strength: White rope sling: minimum 15 kN, Weak link: 2,2 + -0,4, kN according to SOLAS regulations, Release Depth: 1,5 - 4 m

Part Number: HR-0103

# 35

## LIFERAFT EQUIPMENT

#### H20 SMALL RAFT MODEL (DARK GREEN)



Part Number: HR-0200

## WHITE BRAIDED POLYESTER LINE, **8MM DIAMETER**



White strong rope for use in combination with Hammar H20. BREAKING STRENGTH MINIMUM 15KN. SUPPLIED BY METRE IN BULK.

Part Number: HR-0114

#### HAMMAR

The lower strenght of the weak link will allow smaller liferafts to break, and release the inflated life raft. Suitable for smaller fishing, yacht and, recreational life rafts., This model is designed for liferafts from 4 to 12 persons AND outside SOLAS, regulations. English top label. BV Type approved and USCG approved., Product Specification: 4-12 persons rafts outside SOLAS regulation, Breaking Strength: White rope sling: minimum 15 kN, Weak link 1,2 +/-0,4 kN, Release Depth: 1,5 - 4 m

MMAR

A weak link for deck mount

for use when rafts painter

line is transfered to, other

position than H20 HRU., Bre-

aking Strength: 2,2 +-0,4kN

Part Number: HR-0190

WEAKLINK

SYSTEM

## WEAK LINK



HAMMAR

LENGTH 78MM AND WIDTH

32MM. PRODUCT SPECIFI-

CATION:STAINLESS STEEL,

LONG MODEL, 8MM

Part Number: TR-0004

Part Number: HR-0113

SHACKLE



THIS MODEL IS DESIGNED TO BE USED IN AN APPLICATION WHERE THE, standard weak link is not suitable. Breaking strength 2,2 +- 0,4kN according to, SOLAS regulation. Total length 230mm.

SENHOUSE



Pelican type slip hook for manual release of Life Rafts, Stainless steel, 195 mm long, Breaking Strength:17 kN +/-10%, Weight:0.2kg, Maximum working load 15kN.

Part Number: TR-0001



## **Everlux Maritime** is MariTeams trusted partner IMO Signage

Everlux Maritime are pioneers in the industry, we are proud to present the cutting-edge IMO signage designed specifically for ships. With a firm commitment to safety and compliance, the products are engineered to meet the stringent regulations set by the International Maritime Organization (IMO).

# Why Choose Everlux Maritime IMO Signage?

Unparalleled Quality: Our IMO signage is manufactured using top-grade materials, ensuring du rability and longevity even in harsh marine environments. We prioritize quality to guarantee that our signs remain highly visible and legible, maximizing safety onboard.

Compliance Assurance: We understand the importance of adhering to IMO regulations. Our signage solutions are meticulously crafted to meet the specific requirements outlined in SOLAS (Safety of Life at Sea) and other applicable IMO standards. By choosing Everlux Maritime, you can trust that your vessel will be fully compant.

Enhanced Visibility: Safety should never be compromised due to poor visibility. Our IMO signage features highquality photolumi-

nescent technology, enabling clear visibility even in low light or emergency situations. This ensures swift and efficient evacuation procedures and enhances crew and passenger safety.

Customizable Solutions: We recognize that every vessel is unique. That's why we offer customizable IMO signage solutions to meet your specific needs. Our experienced team can tailor the signs to match your vessel's layout, ensuring optimal placement and functionality.

Global Reach: Wherever your vessel may be, we we can ship high-quality IMO signage and comprehensive support to enhance safety onboard.



#### FIREMAN'S OUTFIT

#### FIRE FIGHTER INTERVENTION SUIT (JACKET + TROUSERS)



Part Number: 330925-x

#### NOMEX BALACLAVA FOR FIREMAN'S OUTFIT



The Flame retardant anti-flash hood is a lightweight balaclava which protects the, firefighters face, neck and head from extreme radiating heat and flame.

Aprroved according to EN 358-1999 -DIN 14927:2005, KEY FEATURES,

Washable, Flame retardant, Fuel oil re-

sistant and slip resistant rubber outso-

le. Mateial Plyester / Aluminium, Body

Width 1000-1100mm

Fire-resistant garment with a two-lay-

er aramid thermal barrier. Breathable,

water-repellent outer shell. Touch-

and-close sleeve and collar fastening.

Front zip closure under flap. Triple-trim

reflective tape for high visibility. Sizes:

S - XXXL. Approvals: EN 469:2020, EN

1149-5:2018, EN ISO 13688:2013, SO-

LAS, MED.

Part Number: 310536

# SAFETY



Part Number: 330960

#### HEAVY DUTY FIRE RESCUE **AXE LARGE 900MM**



With wide cutting blade and small lifting end. Enforced with secured zink clip. Red coated head, Ash wood steel , 900 mm long, about 2.5 kg

#### FIRE HELMET



Part Number: 330921

#### FIRE BELT HEAVY TYPE



Part Number: 131085

FIRE AXE + POUCH



Part Number: 330968

#### RUBBER BOOTS



Part Number: 330924x

Flame-retardant boots, EN 11612 A1 B1 C1, EN 61482-1-1 Class 1. Sizes: EU 40-48. Heat, chemical, and cold-resistant rubber upper. Slip and fuel oil-resistant outsole. Withstands 18kV. Steel midsole and toe cap (EN ISO 20345). Woven cotton canvas lining.

#### Fire Belt, Heavy type, with Ring for Suspension of the Refractory Rope. May be used with 6lt breathing apparatus to cover MED certification requiring the use, of rope and belt.

Fire helmet, EN 443:2008, EN

14458:2004, EN 166:2001, MED. Type

A3b, E2 insulation. Shock absorber,

penetration-resistant, reflective ele-

ments. Includes neck protector (ara-

mid, Nomex, or wool). Fire-retardant

aramid chinstrap. Resistant to chemi-

cals, flames, heat, and molten metal.

Aprroved according to EN 358-1999 -DIN 14927:2005, KEY FEATURES, Lenght 34cm, Insulated rubber handle, High voltage resisistance 2000V, Leather pouch for belt mounting

38

# FIRE EQUIPMENT

#### FIRE **GLOVES**



Part Number: 330925x

#### FIRE SAFETY LINE, **30 METERS**



Part Number: 330970

Steel wire with snaphooks, Length: 30 meters, Material: Stainless steel, Diameter of wire: 5mm. Material of hook: Stainless steel

#### FIREMAN'S OUTFIT

CROW BAR



Part Number: 2399-050

#### LED INTRINSICALLY SAFE FLASHLIGHT



CLASS I DIV 1: GRPS A-D T3, Momentary or constant-on flashlight, Impact & chemical resistant, LED technology, Powered by 3 AA batteries (not included), Built-in pocket/belt clip.

Fire gloves, EN 659:2003/A1:2008

SOLAS approved.

with cut-resistant

Cow-nappa leather

para-aramide lining.

Eurotex membrane. Elastic wrist tighte-

ning. Kevlar thread.

Sizes: 9-12.

#### LED INTRINSICALLY SAFE PENLIGHT



Adalit L1 professional penlight for hazardous environments (ATEX Zone 0/20). Lightweight, durable, and versatile. Features a built-in neodymium magnet for hands-free use and a universal helmet adapter.

Part Number: 792266

Part Number: 792272

#### NIGHTSTICK XPR-5568RX LED/ ATEX

LED rechargeable intrinsically safe dual-light. Head rotates 90° for precise beam direction. 50,000+ hour LED lifespan. Parabolic reflector for a focused beam. Dual-light mode for maximum visibility and safety. Glass-filled nylon polymer housing. Stainless steel pocket clip. Waterproof, impact, and chemical resistant. Powered by rechargeable lithiumion battery (included) or 3 AA batteries (not included) with AA battery carrier (included).



#### FIREFIGTHER STORAGE BAG

Durable and spacious firefighter storage bag with a universal design. Features a bright red color for high visibility, ideal for storing firefighting gear and equipment.



#### FIRE EXTINGUISHER

#### 1KG ABC **DRY POWDER**



Part Number: 17-0135211

#### 6KG ABC DRY POWDER



Part Number: 17-0135214

#### 12KG ABC DRY POWDER



(600)

(600)

(600)

with one seam vessel. Pressure Gau-

ge Safety Release Valve, metallic

bracket included., Extinguishing Agent

ABC 40%, Operating Temperature -30 to +60 ∞C, Max Allowable Pressure

18 bar, Test Pressure 27 bar, Volume

of Equipment 1,24 lt, Cylinder Height

270±2 mm, Cylinder Diameter 85±1

with one seam vessel and Pressure

Gauge Safety Release Valve. -Metal-

lic Bracket Included., Extinguishing Agent ABC 40%, Operating Tempera-

ture -30 to +60 ∞C, Max Allowable

Pressure 18 bar, Test Pressure 27 bar,

Volume of Equipment 7,8 lt, Cylinder

Height 450 ± 5 mm, Cylinder Diameter 160 ± 1.5 mm, Cylinder Neck Thread

mm

M30x1,5

with one seam vessel. Pressure Gauge Safety Release Valve. - metallic bracket, included, Extinguishing Agent ABC 40%, Operating Temperature -30 to +60 coC, Max Allowable Pressure 18 bar, Test Pressure 27 bar, Volume of Equipment 13Lt It, Cylinder Height 535 ± 5 mm, Cylinder Diameter 190 ± 1.5 mm, Cylinder Neck Thread M30 ± 1.5mm

Part Number: 17-0135216

#### 6LT 1,5% ECO FOAM



Part Number: 17-0501080

(600)

with one seam vessel with an internal plastic layer and Pressure Gauge Safety Release, Valve. Filled with environmentally friendly Foam. Metallic bracket included, Extinguishing Agent BSX233 1,5%, Operating Temperature +5 to +60 coC, Max Allowable Pressure 18 bar, Test Pressure 27 bar, Volume of Equipment 7,9 lt, Cylinder Height 470 ± 5 mm, Cylinder Diameter 160 ± 1,5 mm

Part Number: 17-0501081





Part Number: 17-0135212

#### 9KG ABC DRY POWDER



Part Number: 17-0135215


#### AUTOMATIC FIRE BALL **1.3KG DRY POWDER**



Part Number: 17-0135205

9LT 1,5%

ECO FOAM



(600)

ABC 90% dry powder automatic fire extinguisher in a ball shape. Activates automatically at 70∞C when placed on a special bracket or by throwing it into the fire. No need to approach flames. Suitable for electrical cabinets, servers, flammable materials, chemical canisters, solid fuels, and risk areas. Emits a sound as a fire alarm. Gross weight: 1.3±0.2 kg.



with one seam vessel with an internal plastic layer and Pressure Gauge Safety Release, Valve. Filled with environmentally friendly Foam. Metallic brack, Extinguishing Agent BSX233 1,5%, Operating Temperature +5 to +60 ∞C, Max Allowable Pressure 18 bar, Test Pressure 27 bar, Volume of Equipment 11 It, Cylinder Height 525 ± 5 mm, Cylinder Diameter 180 ± 1,5 mm



ABC 40% with one seam vessel Pressure Gauge Safety, Release Valve. - metallic bracket included., Extinguishing Agent ABC40%, Operating Temperature -30 to +60 coC, Max Allowable Pressure 18 bar, Test Pressure 27 bar, Volume of Equipment 2,4 lt, Cylinder Height 310 ±2 mm, Cylinder Diameter 110 ±1 mm

with one seam vessel, metallic

±1.5 mm.

FIRE EQUIPMENT

#### FIRE EXTINGUISHER

(600)

with one seam vessel with INTERNAL PLASTIC LAYER and Pressure Gauge Safety, Release Valve. - metallic bracket included., Extinguishing Agent Eco Dare ABF -30[C/M, Operating Temperature -30 to +60 ∞C, Max Allowable Pressure 18 bar, Test Pressure 27 bar, Volume of Equipment 11 lt, Cylinder Height 525 ± 5 mm, Cylin-



der Diameter 180 ± 1,5 mm

Part Number: 17-0501077

9LT WATER

WET

9LT ABF



Part Number: 17-0501028

# WATER MIST WITH ADDITIVE

mm



Part Number: 17-0501104



# (600)

with one seam vessel with INTERNAL PLASTIC LAYER and Pressure Gauge Safety, Release Valve. - metallic bracket included. 100% Fluorine Free., Extinguishing Agent Water with 20% additive, Operating Temperature +5 to +60 ∞C, Max Allowable Pressure 18 bar, Test Pressure 27 bar, Volume of Equipment 11 lt, Cylinder Height 525 ± 5 mm, Cylinder Diameter 180 ± 5 mm

CE 🖸 🎯

with EDPM discharge hose with horn and wooden handle. Galvanized bracket included, Extinguishing Agent CO2, Operating Temperature -30 to +60 ∞C, Max Allowable Pressure 174 bar, Test Pressure 250 bar, Volume of Equipment 7,5 lt, Safety Valve 225 ± 25 bar, Approx. gross Weight 18,9 kg, Approx. Dimensions 665 x 210 mm



(600 with High Strength Front Outlet. Galvanized bracket included, Extinguishing

Agent CO2, Operating Temperature -20 to +60 cc, Max Allowable Pressure 174 bar, Test Pressure 250 bar, Volume of Equipment 3 lt, Cylinder Height 415±1,5 mm, Cylinder Diameter 114 ± 1,14 mm, Approx. Dimensions 600 x 170 mm

Part Number: 17-0135162

5KG

**CO2** 



Part Number: 17-0135371

# CO2 EXCLUSIVE



# mm (())

with one seam vessel with INTERNAL

PLASTIC LAYER and Pressure Gau-

ge Safety, Release Valve. - metallic

bracket included., Extinguishing Agent

Water, Operating Temperature +5 to

+60 cc, Max Allowable Pressure 18

bar, Test Pressure 27 bar, Volume of

PLASTIC LAYER and Pressure Gauge Safety, Release Valve. - metallic bracket included., Extinguishing Agent Water, Operating Temperature +5 to +60 cc. Max Allowable Pressure 18 bar, Test Pressure 27 bar, Volume of Equipment 10,3 lt, Cylinder Height 468 ± 2 mm, Cylinder Diameter 182 ± 2 mm



Part Number: 17-0135259



with one seam vessel with INTERNAL

PLASTIC LAYER and Pressure Gau-

ge Safety, Release Valve. - metallic

bracket included., Extinguishing Agent

Water, Operating Temperature +5 to

+60 oc, Max Allowable Pressure 18

bar, Test Pressure 27 bar, Volume of


Equipment 11 It, Cylinder Height 525




WATER


6LT

6LT




# WATER MIST





(600)

CE 🖸 🎯



Part Number: 17-0501076

WET 6LT

ABF

#### FIRE EXTINGUISHER

#### 6KG **DRY POWDER**



Part Number: 17-0135289

#### 6LT ECO FOAM



Part Number: 17-0135311

#### 6LT WATER



Part Number: 17-0135385

#### TROLLEY FIRE EXTINGUISHER 25KG DRY POWDER



Part Number: 17-0135202

Fire extinguisher with a 5m discharge hose and a valve with a pressure gauge safety release mechanism. Features a third front wheel for easier handling. Agent: ABC 40%. Operating temp: -30 to +60∞C. Max pressure: 18 bar, test: 27 bar. Safety valve: 22-28 bar. Volume: 30L. Gross weight: 60.5 kg. Dimensions: 1000x390 mm.

(600)

TROLLEY FIRE EXTINGUISHER **50KG DRY POWDER** 



Part Number: 17-0135203

9KG **DRY POWDER** 

CE 🖸 🎯

(600)

(600)

Knob-Operated - metallic bracket in-

cluded., Extinguishing Agent ABC

40%, Operating Temperature -30 to

+60 oc, Max Allowable Pressure 18

bar, Test Pressure 27 bar, Volume of

Equipment 7,8 lt, Safety Valve 21-26

bar, Approx. gross Weight 9,34 kg, Ap-

Knob-Operated - metallic bracket in-

cluded., Extinguishing Agent BSX233

1,5%, Operating Temperature +5 to +60  $\infty$ C, Max Allowable Pressure 18

bar, Test Pressure 27 bar, Volume of

Equipment 7,75 lt, Safety Valve 21-26

bar, Approx. gross Weight 11 kg, Ap-

Knob-Operated with one seam vessel with INTERNAL PLASTIC LAYER- me-

tallic bracket included., Extinguishing

Agent Water, Operating Temperature

+5 to +60 cc, Max Allowable Pressure 20 bar, Test Pressure 30 bar, Volume of Equipment 7,8 lt, Safety Valve

21-26 bar, Approx. gross Weight 11 kg,

Approx. Dimensions 600x210 mm

prox. Dimensions 600x210 mm

prox. Dimensions 600x210 mm



Part Number: 17-0135290

#### 9LT ECO FOAM



Part Number: 17-0135312

#### 9LT WATER



Part Number: 17-0135386



(600)



Knob-Operated with one seam vessel with INTERNAL PLASTIC LAYER- metallic bracket included., Extinguishing Agent Water, Operating Temperature +5 to +60  $\infty$ C, Max Allowable Pressure 20 bar, Test Pressure 30 bar, Volume of Equipment 11,17 lt, Safety Valve 21-26 bar, Approx. gross Weight 15,5 kg, Approx. Dimensions 655x230 mm



Fire extinguisher with a 5m discharge hose and a valve with a pressure gauge safety release mechanism. Features a third front wheel for easier handling. Agent: ABC 40%. Operating temp: -20 to +60∞C. Max pressure: 18 bar, test: 27 bar. Safety valve: 22-28 bar. Volume: 56L. Gross weight: 85.5 kg. Dimensions: 1200x550 mm.



cluded., Extinguishing Agent ABC 40%, Operating Temperature -30 to +60  $\infty$ C, Max Allowable Pressure 18 bar, Test Pressure 27 bar, Volume of Equipment 11,1 lt, Approx. gross Weight 14,5 kg, Approx. Dimensions 640x230 mm

Knob-Operated - metallic bracket in-

Knob-Operated - metallic bracket in-

cluded., Extinguishing Agent BSX233

1,5%, Operating Temperature +5 to +60  $\infty$ C, Max Allowable Pressure 18

bar, Test Pressure 27 bar, Volume of

Equipment 11 It, Safety Valve 21-26

bar, Approx. gross Weight 15,5 kg, Ap-

prox. Dimensions 655x230 mm

FIRE EQUIPMENT

#### FIRE EXTINGUISHER

Fire extinguisher with a 5m discharge

hose and an internal plastic-lined ves-

sel. Features a third front wheel for

easier handling. Agent: BSX233 1.5%.

Operating temp: +5 to +60coC. Max

pressure: 18 bar. Gross weight: 59.6

kg. Dimensions: 1100x420 mm.

CE 🖸 🎯

#### TROLLEY FIRE EXTINGUISHER **100KG DRY POWDER**



Part Number: 17-0135234

#### TROLLEY FIRE EXTINGUISHER **50LT FOAM**



Part Number: 17-0135033

Fire extinguisher with a 5m discharge hose and internal plastic-lined vessel. Features a third front wheel for easier handling. Gun-type controlled nozzle with advanced materials and stainless steel springs to prevent hose deformation. Agent: BSX233 1.5%. Operating temp: +5 to +60∞C. Max pressure: 18 bar. Gross weight: 94.8 kg. Dimensions: 1300x500 mm.

Fire extinguisher equipped with a 5m

discharge hose and a valve featuring

a pressure gauge safety release me-

chanism. Designed with a third front

wheel for enhanced maneuverability.

Extinguishing agent: ABC 40%. Opera-

ting temperature range: -30 to  $+60\infty$ C.

mensions: 1400x600 mm.

#### Maximum allowable pressure: 21 bar. Approximate gross weight: 149 kg. Di-

(600)

(600)

Part Number: 17-0135085

TROLLEY FIRE EXTINGUISHER **100LT FOAM** 

TROLLEY FIRE EXTINGUISHER

25LT FOAM



Part Number: 17-0501049



Fire extinguisher with a 5m discharge hose and an internal plastic-lined vessel. Features a third front wheel for easier handling. Gun-type controlled discharge nozzle with advanced materials and stainless steel springs to prevent hose deformation. Agent: BSX233 1.5%. Operating temp: +5 to +60 $\infty$ C. Safety valve: 22-28 bar. Gross weight: 105.5 kg. Dimensions: 1400x550 mm.



10KG CO2

(()))

Hose., Extinguishing Agent CO2, Operating Temperature -20 to +60 °C, Approx. gross Weight 63,8 kg, Approx. Dimensions 1100x400 mm





with 5m EPDM Discharge

Part Number: 17-0129000



#### (600) 30KG CO2

with 5m EPDM Discharge Hose Wooden Handle and Flow Control Valve, Heavy Duty, Carriage and wheels, Valve Protection handle., Extinguishing Agent CO2, Operating Temperature -20 to+60 °C, Approx. gross Weight 80 kg, Approx. Dimensions 1400x500 mm

Part Number: 17-0129001

### TROLLEY FIRE (())) **EXTINGUISHER**

# 10KG CO2

2x5KG CO2 with Heavy Duty Trolley of Two Cylinders (7,5Lt) with 5m EPDM Discharge, Hose., Extinguishing Agent CO2, Operating Temperature -20 to +60 °C, Approx. gross Weight 63,4 kg, Approx. Dimensions 1100x500 mm

Part Number: 17-0129004



# FIRE EQUIPMENT

#### FIRE EXTINGUISHER

#### F/E POWDER ABC 40% CARTON BOX 6KG



FLOATING FOAM CARTRIDGE

FOR 6LT FOAM FIRE EXTINGUISHERS

Fire extinguishing Powder ABC40%, Special sealed package in carton box!,  $6Kg \pm 2\%$  according to EN3-7 for refilling of 6Kg fire extinguishers

Fire Extinguishing Foam 1,5%. Floa-

ting Foam Cartridge for Use on 6Lt

Foam, Fire Extinguishers with Internal

Cartridge. Contains 90ml Foam AFFF.

It Makes, Maintenance and Refilling of

Foam fire Extinguishers with Internal

Cartridge, a Simple, Process.

#### F/E POWDER ABC 40% CARTON BOX 25KG



Fire extinguishing Powder ABC40%, Special sealed package in carton box., Carton box of 25 Kg

Part Number: 17-0123056

#### FLOATING FOAM CARTRIDGE FOR 9LT FOAM FIRE EXTINGUISHERS



Part Number: 17-0123109

SPARE FOAM BOTTLE

1,5% - 135ML

Fire Extinguishing Foam 1,5%. Floating Foam Cartridge for Use on 9Lt Foam, Fire Extinguishers with Internal Cartridge. Contains 135ml Foam AFFF. It Makes, Maintenance and Refilling of Foam fire Extinguishers with Internal Cartridge, a Simple, Process.

Part Number: 17-0123108

#### SPARE FOAM BOTTLE 1,5% - 90ML



Part Number: 17-0501107

Foam 1,5% in 90ml Bottle Suitable for replenishment with 1.5% for the 6lt models, (0135311, 0135497)



Part Number: 17-0501108

Foam 1,5% in 135ml Bottle Suitable for replenishment with 1.5% for the 9lt models, (0135312, 0501026)

44



#### FIRE EXTINGUISHER



#### **1** SPARE INT. CARTRIDGE FOR F. E. 6LT

Spare Internal Cartridge for ABF-Wet Chemical / Foam. Fire Extinguishers. Include, special plastic external coating anti-oxidation. Thread: Ø16 1,5mm. L: 282m, Capacity CO2: 65gr. D: 28mm

Part Number: 17-0128066

#### SPARE INT. CARTRIDGE FOR F. E. 9LT

Spare Internal Cartridge for ABF-Wet Chemical / Foam. Fire Extinguishers. Include, special plastic external coating anti-oxidation. Thread: ø16 1,5mm

Part Number: 17-0128038

#### SPARE INTERNAL CARTRIDGE FOR F. E. 6KG

Spare Internal Cartridge for Dry Powder Fire Extinguisher 6kg, Thread: Ø16 1,5mm. L: 270±10 mm. Capacity CO2: 120gr

Part Number: 17-0128039

SPARE INTERNAL CARTRIDGE FOR F. E. 6KG Spare Internal Cartridge for Dry Powder Fire Extinguishers 12kg, Thread: ø16 1,5mm. L: 380±10 mm. Capacity CO2: 180gr. D: 35mm

Part Number: 17-0128038



#### FIRE CABINETS

PLASTIC TRANSPORTATION PROTECTIVE BOX FOR 1KG/1LT FIRE EXTINGUISHER



Part Number: 17-0133002

#### PLASTIC KEY BOX



Part Number: 17-0134005

#### POLYESTER PROTECTIVE BOX FOR 6KG/LT FIRE EXTINGUISHER



Suitable for Outdoor Use and Hard Weather Conditions - e.g. near the sea., Dimensions: 28 x 65 x 22,5 cm

Nylon Protec-

tive Cover of

**High Strength** 

and Water Pro-

of for Outdoor

Extinguishers.

placed Fire,

Part Number: 17-0132026

#### NYLON PROTECTIVE COVER 6KG/6LT/2KG CO2



Part Number: 17-0133019

PLASTIC TRANSPORTATION PROTECTIVE BOX FOR 2KG/2LT FIRE EXTINGUISHER



Part Number: 17-0133035

#### PLASTIC PROTECTIVE BOX (TRANSPARENT) 6KG / 6LT



Part Number: 17-0132108

#### POLYESTER PROTECTIVE BOX 12KG/9LT



Part Number: 17-0132027

#### NYLON PROTECTIVE COVER 12KG/9LT/5KG CO2



Part Number: 17-0133020

#### HEAVY DUTY PVC COVER 6KG & 6LT



Part Number: 17-0133047

#### PLASTIC PROTECTIVE BOX (TRANSPARENT) 9KG/12KG & 9LT FIRE EXTINGUISHER



Part Number: 17-0132109

Suitable for

Outdoor Use

and Hard We-

ather Conditi-

ons - e.g. near

the sea., Dimen-

sions: 30 x 75 x 22,5 cm

Nylon Protec-

tive Cover of

High Strength

and Water Pro-

of for Outdoor

Extinguishers.

placed Fire,

#### HEAVY DUTY PVC COVER 9KG/12KG/9LT



Part Number: 17-0133048

METALLIC EMERGENCY KEY BOX



Part Number: 17-0147162

#### POLYESTER FIRE HOSE CABINET WITH HOOK



Part Number: 17-0132057

#### Metallic Emergency Key Box, with a small hammer for breaking the glass., SIZE: 16x5x12cm

Suitable in Rough Weather Conditions (e.g.

near the sea)., Dimensions: 420 x 420 x 210 mm



#### FIRE CABINETS

#### PLASTIC PROTECTIVE BOX FOR 6KG/6LT FIRE EXTINGUISHERS



Sealing Rubber and also belts for fire extinguishers are included., Also use for Plastic Protective Storage Box of 1pc Emergency Escape Breathing, Aparatus., Dimensions: 620x335x240 mm

Galvanized steel 1.2mm, RAL3000.

Hose reel with arm bracket. 2" stainless steel pipe. 2" brass angle valve.

Foam mixer 400 L/min with 2" alu-

minium Storz couplings. Rigid foam

suction hose with filter. 2" foam nozzle with aluminium Storz couplings. 2" high-quality hose, 30m, WP 8 bar, with aluminium Storz couplings. Two 25L

foam canisters.

PLASTIC PROTECTIVE BOX 6-9-12KG/6-9LT/5KG CO2



Part Number: 17-0132062

#### FIRE TOOL STATION BIG



Part Number: 17-0131084

FIRE PLAN CONTAINER



Part Number: 332613 (ALUMI-NIUM), 3326131 (PVC)

Plastic Protective Box Heavy Duty for

6-9-12Kg / 6-9Lt /5Kg CO2 F/E. Se-

aling Rubber and, also belts for fire

extinguishers included., Dimensions:


820 x 270 x 250 mm

#### FOAM CABINET - "SPARTAN"



Part Number: 17-0132110

#### PLASTIC CABINET FOR FIRE HOSE AND BRANCHPIPE



Part Number: 17-0132175

chpipe, suitable for marine use. Outer dimensions: 616 × 735 × 270 mm. Inner dimensions: 530 × 700 × 229 mm. Weight: 7.0 kg.

Plastic cabinet for fire hose and bran-

SUPPORT MAGNETIC BASE FOR PORTABLE FIRE EXTINGUISHERS



Part Number: 17-0114116

Support Magnetic Base for Portable Fire Extinguishers 6Kg/9Kg/12Kg & 6Lt/9Lt &, 2Kg/5Kg Co2, Avoid driling use the Magnetic Support Base Suitable for various types of brackets/ fire, extinguishers., Fire extinguisher bracket is not included. SECURITY ALARM - BRACKET



Part Number: 17-0133001

with a place for Mask Breathing 6lt, Electrostatic Coating RAL 3000, UV protection, Dimensions: 800 x 700 x 350 mm, (Products in photos are not included)

Durable, watertight Fire Plan Storage Container designed to securely hold fire and escape route plans. Measuring 1000mm in length, it features a gasket-sealed, chained lid to protect documents from moisture.

Security Alarm – Bracket for Dry Powder, Foam and CO2 F/E (requires a 9V battery)., Activated when the F/E is removed from the Bracket by an Unauthorized Person., Deactivated when Authorized Personnel Inserts Pin into the Bracket.

#### LITHIUM BATTERY FIRE

HEAVY DUTY BRACKET FOR F/E 6 KG / 6LT / 5KG CO2



Galvanized Bracket with Internal Protective Pads. Adjustable Width fitting to Various, Capacities. Electrostatic Coat. A good choice for Dry Powder -Foam permanent System F/E.

T-ladder rubber strap with 4 holes.

Black. EPDM rubber, which is highly

resistant, to heat, UV, water, wind and weather, oil, petrol and much more. Length: 360 mm,, Thickness: ø 12/8

Part Number: 17-0114002

RUBBER STRAP T-LADDER 360 MM

mm



Part Number: 3331-017

HEAVY DUTY BRACKET FOR F/E 12KG / 9LT



Galvanized Bracket with Internal Protective Pads. Adjustable Width fitting to Various, Capacities. Electrostatic Coat. A good choice for Dry Powder -Foam permanent System F/E.

Part Number: 17-0114001

#### SUPPORT BELT



Part Number: 17-0117003

Support belt for 6 - 12 Kg / 6 - 9 Lt Fire Extinguishers. To be adjusted to the Metal, Support Bracket.

FLOOR TYPE STAND FOR F/E

# For 2pcs of Fire For Fire Extinguisher Extinguishers, 6-12 Kg / 6-12 Lt / 2-5 6-12 Kg / 6-12 Kg CO2 with indicative Lt / 2-5 Kg CO2 Fire, Extinguisher Sign For Fire extinguisher 6-12 Kg / 6-9 Lt / 2-5 Kg CO2 Part Number: 17-0114037 Part Number: 17-0114070 Part Number: 17-0114069

DOUBLE FLOOR TYPE STAND FOR F/E

#### FLOOR TYPE STAND FOR F/E

#### LITHIUM BATTERY FIRE

AEROSOL TYPE 0,5LT EXTINGUISHER FOR LITHIUM BATTERIES FIRE



FIRE EXTINGUISHER 6LT

FOR LITHIUM BATTERIES

Extinguishing Agent AVD-Li, Operating Temperature 5°C~+50°C, Max Allowable Pressure 10,8 bar, Approx. Dimensions 314 x 65 mm

One-seam vessel with internal plastic

layer and external thread. Includes

pressure gauge, safety release valve,

non-return valve, and metallic bracket.

Suitable for lithium battery fires. Fire

rating: 13A, mineral-based agent.


(600)

AEROSOL TYPE 0,7LT EXTINGUISHER FOR LITHIUM BATTERIES FIRE S



(600)

for Small Lithium-Ion Battery Fires Life in Service: 3 Years.



(600)


(600)

FIRE EXTINGUISHER 6LT HYDROGEL FOR LITHIUM BATTERIES



Part Number: 17-0501149

One-seam vessel, internal plastic layer, and external thread. Equipped with a pressure gauge, safety release valve, and non-return valve. Suitable for lithium-ion battery fires. Includes a metallic bracket for secure mounting.



#### FIRE EXTINGUISHER 9LT FOR LITHIUM BATTERIES



Part Number: 17-0501129

one-seam vessel with internal plastic layer and external thread. Equipped with pressure gauge, safety release valve, and non-return valve. Suitable for lithium battery fires.

FIRE EXTINGUISHER 9LT HYDROGEL FOR LITHIUM BATTERIES



Part Number: 17-0501150



One-seam vessel, internal plastic layer, and external thread. Equipped with a pressure gauge, safety release valve, and non-return valve. Suitable for lithium-ion battery fires. Includes a metallic bracket for secure mounting.



TROLLEY FIRE EXTINGUISHER 25L HYDROGEL FOR LITHIUM FIRES

Part Number: 17-0501163



TROLLEY FIRE EXTINGUISHER **50L HYDROGEL** FOR LITHIUM FIRES

Part Number: 17-0501164



# FIRE SAFETY

Fire safety is crucial in any setting, be it on land or at sea. Regularly checking and training with fire extinguishers and equipment is essential to ensure preparedness, functionality, and compliance with SOLAS requirements.

#### **Ensuring Preparedness:**

Regular training equips individuals with the knowledge and confidence to respond swiftly and effectively in case of a fire emergency. Participants learn to identify fire types, select the appropriate extinguisher, and apply the correct techniques, minimizing risks and injuries. Maintaining Functionality: Routine checks and maintenance of fire extinguishers and equipment identify defects, damage, or expired materials that may hinder their effectiveness. Timely repairs and replacementsguarantee reliable operation during emergencies.

#### **Compliance with SOLAS:**

Adhering to SOLAS requirements is crucial for ships' fire safety. It mandates regular inspection and maintenance of fire extinguishers and equipment, demonstrating a commitment to safety and reducing fire-related risks on board.

# FIRE HOSE WP 15/16 BAR TP 48 BAR, BP ≥50 BAR

New Optimized Internal Lining with Advanced Specifications e.g. High Strength in Tensile Stress. Tested One by One! Certified according to EN 14540 / MED / SOLAS.

Sn	TURNER	4540
NA	EN1	1540
	-141.	10

Aluminium

1111116

Storz (other types availeble)

15B112-15-MED	11/2"	15	m
15B112-20-MED	11/2"	20	m
15B112-25-MED	11/2"	25	m
15B112-30-MED	11/2"	30	m
504-AH3-20MED	13/4"	20	m
15B2-15-MED	2"	15	m
15B2-15-MED	2"	18	mille
15B2-20-MED	2"	20	m
15B2-25-MED	2"	25	m
15B2-30-MED	2"	30	m

· AMERICAN (NH) COUPLINGS & ADAPTORS
· BARCELONA COUPLINGS & ADAPTORS
· GOST COUPLINGS & ADAPTORS
· GUILLEMIN COUPLINGS & ADAPTORS
· INSTANTANEOUS COUPLINGS & ADAPTORS
· MACHINO COUPLINGS & ADAPTORS
· NAKAJIMA COUPLINGS & ADAPTORS (JIS)

NORLAS COUPLINGS & ADAPTORS
NUNAN & STOVE COUPLINGS & ADAPTORS
ROTTA COUPLINGS & ADAPTORS
SMS COUPLINGS & ADAPTORS
STORZ COUPLINGS & ADAPTORS
UNI COUPLINGS & ADAPTORS

Navigating through the myriad of standards in Fire Couplings and Adaptors can be time-consuming and challenging. That's why MariTeam is here to streamline the process for you! With our extensive experience in international standards, we are experts at finding the perfect sizes to match what is already on board your vessel. But our expertise doesn't stop there! Even if your requirements go beyond the standard options, we are well-equipped to assist you with custom-built fittings tailored to your unique needs. At MariTeam, we take pride in being your go-to supplier for all your international fire couplings and adaptors. Our comprehensive range of high-quality products ensures that your vessels are equipped with the finest couplings and adaptors available.

Don't waste precious time searching for the right sizes and specifications. Trust MariTeam to deliver the perfect fire couplings and adaptors, meeting both international standards and your specific requirements.



#### **OSW SMARTFIT**





Efficiency and speed are of enormous importance for the deployment of rescue workers. Often it's about minutes or even seconds. This makes it all the more important that equipment is quickly at hand and ready for use. This also includes the integration of a hose coupling to the required hose on site. We have accepted this challenge and created an efficient and economical integration system with our innovation OSW smartFIT. In just three steps, couplings can be integrated into the hose using the OSW smartFit clamping shells. Apart from an Allen key, no other tools or equipment are required. Our OSW smartFIT integration system is available in sizes C/42, C/52 and B/75.

#### The "smart" integration system scores with many advantages:

- Perfect sliding function due to conical shape
- Binding and unbinding also possible at the point of use
- · Significant time savings when laying the hose in use
- made of high-strength, glass fibre reinforced plastic
- High material strength
- Much higher strength of the cover than required by DIN14811



#### SMARTFIT CLAMP SLIDE RING (WITHOUT RFID), C/52MM

1 set = 2 half shells, 2 screws, 2 nuts Clamp sliding ring made of impact and temperature resistant glass fiber reinforced plastic effectively snagging the clutches and enables the fastest integration even on location.

2 set per hose necessary, Suitable for all Storz couplings according to DIN PART NUMBER: 3333-005 SMARTFIT CLAMP SLIDE RING (WITH RFID), C/52MM

1 set = 2 half shells, 2 screws, 2 nuts Clamp sliding ring made of impact and temperature resistant glass fiber reinforced plastic effectively snagging the clutches and enables the fastest integration even on location.

2 set per hose necessary, Suitable for all Storz couplings according to DIN PART NUMBER: 3333-006



#### HOSE COUPLINGS



#### PORTABLE HOSE BINDING DEVICE

With Coupling Using Galvanized Wire. Suitable for 1" to 4" Hose. Consists of Two Parts:, the Hose Vice and the Wire Binding Component. Also Suitable for Marine Use On Board

**Part Number:** 3331-002

Inlet connection thread 2"

male Inside dia. d (mm) 45 Face-to-face length, L (mm) 90 Flange-dia., D (mm) 178 LK/z 132/4, Hole dia. (mm) 19

SPARE WIRE FOR PORTABLE HOSE BINDING DEVICE



Part Number: 2346-139

INTERNATIONAL SHORE CONNECTION WITH BOX




Part Number: 332610

INTERNATIONAL SHORE CONNECTION WITHOUT BOX



Part Number: 332612

HOOK WRENCH FOR STORZ COUPLINGS 1" - 3"



Part Number: 17-0134020





Part Number: 17-0134021



53

#### FOG & JET NOZZLES



# CERTIFIED ALUMINUM BRANCHPIPE 2"

Jet - Spray- Stop Switch and Water Curtain For additional protection from Heat and, Smoke, Ranging from 0° – 160° (with Female Storz Coupling). Certified according to, EN 15182-3

Part Number: 17-0101037

# CERTIFIED ALUMINUM BRANCHPIPE 2 1/2"

Jet - Spray- Stop Switch and Water Curtain For additional protection from Heat and, Smoke, Ranging from 0° - 160° (with Female Storz Coupling). Certified according to, EN 15182-3

Part Number: 17-0101038



JET/SPRAY NOZZLE

Durable jet/spray nozzle with interchangeable V12, V16, and V19mm tips. Made from hardened orange plastic and available with Storz, John Morris, or Nakajima coupling options. Certified to EN15182-1:2007, EN15182-3:2007, MED, and DNV standards.

Part Number: 333501 (Storz or Nakajima coupling available)

JET/SPRAY NOZZLE

Part Number: 333502 (Storz or Nakajima coupling available)

JET/SPRAY NOZZLE

- V19 Part Number: 333503 (Storz or Nakajima coupling available)



Water Fog & Jet Nozzle **V12, Brass** Durable brass water branch pipe with dual-purpose nozzle for spray and jet

Part Number: 33360122(Storz-C), 33360121 (Nakajima)

Water Fog & Jet Nozzle V16, Brass

functions.

Part Number: 33360220 (Storz-C), 33360223 (Nakajima)

Water Fog & Jet Nozzle **V19, Brass** 

Part Number: 33360320 (Storz-C), 33360323 (Nakajima)

#### TURBOJET NOZZLES 2 1/2" JOHN MORRIS

#### TURBOJET NOZZLES 2" STORZ C

High-performance 2 1/2" John Morris turbojet nozzle with a 4-position adjustable wat s er beam and lever-controlled flow rate. Delivers 463 L/min at 7 bar for efficient firefighting and water distribution.

Part Number: 17-0101030

High-performance 2" Storz C turbojet nozzle with a 4-position adjustable water beam and lever-controlled flow rate. Delivers 463 L/min at 7 bar for efficient firefighting and water distribution.

Part Number: 17-0101042



#### EEBD

#### ESCAPE BREATHING APPARATUS 15 MIN



Part Number: 17-0104001

Complies with the requirements in the following Regulations/Standards:, Regulation (EU) 2018/773, item No. MED/3.41. SOLAS 74 as amended, Regulation II2/13, FSS Code 3 and IMO MSC/Circ. 849, for marine use, Tested according to ISO 23269-1:2008 and EN 1146:2005.

SPARE PART FOR 3LT EEBD – BAG



Part Number: 17-0104025

SPARE PART FOR 3LT **EEBD – MASK** 



Part Number: 17-0104023



The OCENCO M-20.2 is a self-contained, closed-circuit breathing apparatus.Complies, with the requirements in the following Standards:, Oxygen Delivery Automatic on, demand regulated, Performance Duration 10 minutes – NIOSH Approved, 15 minutes – CE Marked, Donning Time Less than 10 seconds, Service Life 15 years, Inspection Visual, Inspection Frequency Annually for stored units; daily for deployed units, Approvals MED Wheelmark, CE/EN13794, NIOSH, Storage Case Dimensions 21cm x 23cm x 10cm

Part Number: 348005



#### OCENCO M-20.2 REPLACEMENT LABEL



Part Number: 348006

#### OCENCO M-20.2 M-20.2T TRAINER



Part Number: 348008

#### **SCBA**

#### **3M/SCOTT BREATHING APPARATUS** COMPLETE WITH CYLINDER 300BAR



Sigma 2 Type 2 offers proven durability, reliability, and ease of use. Featuring an ergonomic, lightweight backplate, Type 2 harness, and Kevlar flame-retardant webbing, it supports 200/300 bar cylinders. All components are user-serviceable, low-cost, and MED Type 2 approved.

Positive-pressure face masks feature

a liquid silicone rubber outer mask

with a reflex seal and a TPE ori-nasal

inner mask. Designed for compatibi-

lity with all 3Mô Scottô breathing ap-

paratus, they offer a panoramic poly-

carbonate visor and allow the use of

integrated spectacle frames without

Testmanometer for testing breathing

air cylinders. The cylinder pressure

test gauge is, specifically designed

for checking the contents of a cylinder

whilst it is not connected, to a BA set., Manufactured to Applicable CE/ISO

compromising the seal.

standards

Part Number: 4045-002

3M/SCOTT MASK FOR SIGMA II - PROMASK PP



Part Number: 4045-004

#### 3MÔ SCOTTÔ TEST MANOMETER 200/300 BAR



Part Number: 4045-046

#### SEA DROPS ANTI-FOG AND MASK CLEANER



Part Number: 330422

Anti-fog and lens cleaner for glass and plastic dive masks, effective in all temperatures. Concentrated: A 1.25 fl oz bottle provides 530 drops for multiple treatments, safe for silicone and rubber. Long-Lasting: Ensures fog-free vision for hours with just one drop.

#### **3M/SCOTT BREATHING APPARATUS** WITHOUT CYLINDER



Part Number: 4045-025

#### **3M/SCOTT STEEL CYLINDERS**



Part Number: 4045-003

#### **3M/SCOTT CARRYING** CASE FOR CABA



Part Number: 4045-045

#### BAUER JUNIOR II



Part Number: 3331-043

BAUERís most compact mobile compressor, featuring advanced technology in a space-saving design. The JUNIOR II high-pressure compressor (90ñ330 bar, 100 l/min) is ideal for air and breathing air compression. Available with a three-phase motor, single-phase motor, or petrol engine. Additional Features: Extra filling device for 225/330 bar and a switchover device for easy pressure adjustment.

Designed for infrequent use, 3M Scott steel cylinders feature cost-effective steel construction with 200 or 300 bar charging pressure. Manufactured to CE/ISO standards and MED approved, they provide reliable performance for breathing apparatus.

Sigma 2 Type 2 ensures proven dura-

bility, reliability, and ease of use. It fea-

tures a compact first-breath activated

demand valve with bypass, an ergo-

nomic lightweight backplate, a Type

2 harness, and Kevlar flame-retardant webbing. User-serviceable, low-cost,

and MED Type 2 approved, it supports

200/300 bar cylinders.

Heavy-duty carrying case designed for self-contained air breathing apparatus, ensuring secure storage and easy transport

#### SCBA

#### BREATHING APPARATUS COMPLETE WITH CYLINDER



Part Number: 17-20000

#### FANGZAN STEEL CYLINDER



Part Number: 17-20171

#### BACK FRAME AND HARNESS



Part Number: 17-20558



FANGZAN

MASK

FANGZHAN RHZK6 is a certified 300bar 6L SCBA air breathing apparatus with over 30 minutes service time. Approved to SOLAS, CE, MED, EN136/137, it includes mask, cylinder, regulator, and carry case. Ideal for firefighting and confined space rescue.



Spare steel air cylinder for RHZK6/30 SCBA. 6L capacity, 300 bar working pressure, with G5/8 thread. Durable steel construction ensures reliable performance for firefighting and rescue operations.

FZB-1 back frame and harness is de-

signed for the RHZK6 SCBA set, of-

fering strong support and ergonomic

comfort. Built for durability and ease

of use in firefighting and rescue ope-

rations. Adjustable straps ensure a

secure fit.



Part Number: 17-20001

Part Number: 17-20563

CASE FOR SCBA

CARRYING

TEST MANOMETER 200/300 BAR



Part Number: 330428

0-----

FZM-1 full face mask is designed for use with the RHZK6 SCBA set. It provides a secure, airtight seal and clear visibility for firefighting and rescue operations. Built for safety, comfort, and reliable performance in demanding environments.



Heavy-duty carrying case designed for self-contained FANGZAN air breathing apparatus, ensuring secure storage and easy transport.

Testmanometer for testing breathing air cylinders. The cylinder pressure test gauge is, specifically designed for checking the contents of a cylinder whilst it is not connected, to a BA set., Manufactured to Applicable CE/ISO standards



#### FIRE FOAM



fomtec

# **TRAINER E-LITE**

#### Part Number: 11-1149-01 (25L)

Fomtec Trainer E-Lite is a fluorine-free training foam designed for realistic firefighting training. It offers excellent expansion and drainage, works with most standard foam equipment, and is suitable for use with fresh or seawater. Safe and environmentally friendly.

## FOMTEC ENVIRO 3X3 ULTRA

Fomtec Enviro USP is a fluorine-free firefighting foam, free from PFAS. Designed as an effective alternative for sprinkler systems and Type II & III discharge devices. Used at 2% with fresh water for various expansion levels, 3% for sprinklers, 0.5-1% for Class A fires, and 6-9% for polar solvents. Compatible with seawater at 6%.

Part Number: 12-3355-01 (25L)





And the at block with





58



FIRE FOAM

# HIGH-PERFORMANCE PFAS-FREE FOAM SOLUTIONS WITH FOMTEC

At MariTeam, we are dedicated to providing our clients with state-of-the-art, environmentally responsible firefighting solutions. Through our partnership with Fomtec, we offer an extensive range of PFAS-Free Foam Concentrates developed to meet and exceed the highest international safety standards.

The need for PFAS-free foam products has never been more critical. With increasing global restrictions and supporting legislation aimed at eliminating harmful chemicals associated with traditional fluorinated foams, the transition to safer, more sustainable alternatives is essential. Unlike older formulations, Fomtec's Enviro range is completely fluorine-free, ensuring that when firefighting foams are deployed, the environmental impact is minimized without compromising performance.

Through years of intensive research and development, including over 1,500 fire performance tests, Fomtec has created a comprehensive portfolio of Fluorine-Free Foam Concentrates. These solutions are designed to address a wide range of applications, including Marine, Offshore, Aviation, Industrial, Municipal Fire & Rescue Services (FRS), and Military operations. The Enviro range offers outstanding fire suppression capabilities even under the most challenging conditions, including saltwater environments, multi-purpose applications, and polar solvent resistance.

Fomtec's commitment to sustainability and performance is backed by rigorous certification standards such as MED, IMO, FM 5130, UL 162, EN 1568-3 & -4, ICAO and US Forestry Service QPL. As global regulations continue to phase out fluorinated foams, adopting PFAS-free alternatives is not only a responsible choice but a necessity for long-term environmental protection.

Together with Fomtec, MariTeam is here to support your transition to a cleaner, safer, and more effective firefighting solution. Our commitment goes beyond providing high-performance foam products; we offer comprehensive technical support and guidance to ensure optimal safety and efficiency in your firefighting systems.

#### PACKAGING

We supply thise products in 25 litre, 200 litre drums, 1000 litre IBC containers. Larger bulk.

#### STORAGE/SHELF LIFE

Stored in original unbroken packaging the pruduct will have a long shelf life. Shelf life Shelf life in excess of 10 years will be found in temperate climates. As with all foams, shelf life will be dependent on storage temperatures and conditions.

#### FIRE FOAM

#### FOMTEC ENVIRO USP



Part Number: 11-6000-01 (25L)

# FOMTEC **P 3%**



Part Number: 13-3004-01 (25L)

#### FOMTEC ENVIRO SEA 1%



Part Number: 11-6301-01 (25L)

FOMTEC ENVIRO SEA 6%



Fomtec Enviro Sea 6% is a PFAS-free firefighting foam concentrate made with surfactants, stabilizers, and boosters. Designed for hydrocarbon fuel fires like oil, diesel, and other water-immiscible fuels, it is ideal for marine use and works effectively with seawater.

Fomtec Enviro USP is a fluorine-free

firefighting foam, free from PFAS. Designed as an effective alternative

for sprinkler systems and Type II & III

discharge devices. Used at 2% with

fresh water for various expansion le-

vels, 3% for sprinklers, 0.5-1% for Class

A fires, and 6-9% for polar solvents.

Fomtec P 3% is a fluorine-free protein

foam made from hydrolyzed protein,

foam boosters, stabilizers, and pre-

servatives. It forms a tough, heat-re-

sistant foam blanket on hydrocarbon

fuels with excellent burnback resistan-

ce. Used at a 3% proportioned solution

in fresh or seawater. Freeze-protected to  $-16\neg \infty C$ . Multi-approved and PFAS-

Fomtec Enviro Sea 1% is a PFAS-free

firefighting foam concentrate made

with surfactants, stabilizers, and boo-

sters. It targets hydrocarbon fuel fires

like oil, diesel, and other water-immi-

scible fuels. Specially designed for

marine use, it works effectively with

free.

seawater.

Compatible with seawater at 6%.

#### FOMTEC LS EXP



Part Number: 11-3112-01 (25L)

#### FOMTEC P 3% AR



Part Number: 13-3310-01 (25L)

#### FOMTEC ENVIRO SEA 3%



Part Number: 11-6303-01 (25L)

Fomtec LS EXP is a high-performance, fluorine-free high expansion foam concentrate for use in any high expansion system. Made from hydrocarbon surfactants, solvents, and stabilizers, it is 100% biodegradable and PFASfree. Used at 2-3% in fresh or seawater. Approved to EN 1568, ISO 7203, and IMO 670. Tested with inside air, with a documented filling height of up to 35m.

Fomtec P3% AR is a fluorine-free alcohol-resistant protein foam (P-ARC) made from hydrolyzed protein, hydrocarbon surfactants, polymers, solvents, and stabilizers. It rapidly covers burning surfaces, effectively extinguishing hydrocarbon and polar solvent fires. Approved to IMO 1312 and MED. Freeze-protected, suitable for Class A & B fires, and supports low and medium expansion.

Fomtec Enviro Sea 3% is a PFAS-free firefighting foam concentrate made with surfactants, stabilizers, and boosters. It is designed for hydrocarbon fuel fires like oil, diesel, and other water-immiscible fuels. Ideal for marine use, it works effectively with seawater.

Part Number: 11-6306-01 (25L)

#### FIRE TESTER

# SOLO 461 HEAT DETECTOR **Test Kit**



Part Number: SOL0461-001

# SOLO100 TELESCOPIC



Part Number: 100-001

# TEST GAS



Part Number: A5-001

Solo 461 cordless heat detector test kit suits fixed temperature, rate-of-rise, and combination detectors up to 194°F/90°C. Battery-powered with no cables, it allows testing at height, angles, or low levels. Compatible with Solo access poles for testing up to 9m, using patented focused heat technology.

Solo100 is a lightweight, durable tele-

scopic pole for safe access to high-le-

vel detectors. Extends from 1.26m to

4.50m with four adjustable sections.

Compatible with fire detector testers, it reduces ladder use, enhancing work-

place safety. Ideal for fire safety and facility management professionals.

Solo smoke test aerosols 250ml (flam-

mable) for use with Solo 330/332. Delivers smoke particles to detectors,

replicating fire conditions. Approved

worldwide, manufacturer-approved, and UL certified. Compliant with the latest aerosol regulations, ensuring

reliable detector testing.

Part Number: SOL0330-001

SOLO 330 AEROSOL

Smoke/CO Dispenser

# TEST GAS Solo A10



Part Number: 330967

# FLAME DECTOR



Part Number:

Solo smoke test aerosols are approved worldwide and deliver smoke particles to detectors, replicating fire conditions, designed for Solo 330/332 dispensers, compliant with aerosol regulations, and non-flammable.

Solo 330 works with Solo A5 and A10

aerosols for compliant smoke detec-

tor testing. The dispenser conserves

smoke, ensuring fast and reliable

results with minimal waste. It is also compatible with Solo C3 aerosol for

testing CO fire detectors.

Flame Detector Test Lamp activates UV, IR and UV/IR Flame Detectors which detect in the 185-235 nm UV and  $4.4\mu$  IR frequency ranges.



CO2 BOTTLES

# LEVEL MEASURING







#### PART NUMBERS:

HS-MLI-2: EXTENSION PROBE ROD (600mm)

HS-MLI-3: 900 PROBE ROD (320mm+580~980mm)

HS-MLI-4: STANDARD PROBE ROD and one EXTENSION PROBE ROD

HS-MLI-5: STANDARD PROBE ROD and one 900 PROBE ROD

HS-MLI-6: EXTENSION PROBE ROD and one 900 PROBE ROD The Portable Ultrasonic Liquid Level Indicator is designed to measure the presence or absence of the liquid at a certain height position in a container or in pipelines. Due to the technique of non-contact detection this liquid level indicator is an ideal choice for the detection of dangerous toxic or corrosive liquids. One Probe with two sensors, suitable for various types of tanks; No need of ultrasonic couplant, cost saving, convenient and no pollution; Three kinds of probe rod optional for different requirement. CO2 Bottle Level Measuring HS-MLI-1 is most common with one indicator with one standard probe rod (190mm).

Part Number: HS-MLI-1: STANDARD PROBE RODE(190mm)

D PE (I

62

#### **PROTECTIVE SUITS**

#### TESIMAX GS 3/GS 3M POLYRAN-L



Complete gas and chemical protection suit (gas-tight), designed for firefighters. One-piece with a molded rubber seal in the hood for a secure fit under full-face masks. Features gastight zip, integrated gloves, boots, and pressure relief valves. Lightweight, flexible, reusable, and highly chemical-resistant. Available in yellow, red, or white.

Part Number: 0222-151 XL

#### TESIMAX GS 3/GS 3M SYKAN 4



Complete gas and chemical protection suit (gas-tight), ideal for firefighters. One-piece design with a molded rubber seal in the hood for a secure fit under full-face masks. Features a 130 cm gastight zip, integrated gloves, boots, and pressure relief valves. Made from para-aramid fabric with HPF elastomers and a PTFE barrier for top-tier NBC/CBRN protection.

Part Number: 0222-214XL

#### RESPIREX GTL ESD GAS-TIGHT SUIT



The GTL ESD is a Type 1A-ET single-use gas-tight suit designed for emergency responders, providing protection against toxic gases, liquids, and chemicals. Its electrostatic dissipative construction allows use in ATEX environments. Certified to EN 943-2:2019 (ET) and SOLAS standards. Seven-year maintenance-free shelf life, maximum of 10 years.

Part Number: GTL ESD

#### **RESPIREX GAS-TIGHT TRAINING SUIT**



A training version of the Respirex fully encapsulating Type 1A-ET gas-tight suit. Made from green PVC and clearly marked as a training suit to prevent confusion in emergencies. Replicates the features of the operational suit and is designed for multiple reuses without testing. Material: PVC C2.

Part Number: TRAINING SUIT

#### RESPIREX SPLASHMASTER COVERALL



Part Number: SPLASHMASTER

A lightweight, Type 3 liquid-tight hooded coverall for limited reuse. Designed for use with a full-face mask and filter or other respiratory protection. Made from Chemprotexô 300 for high chemical resistance, with a comfortable spun-bonded lining. Ten-year shelf life

TESIMAX GS 3/GS 3M SYKAN 2



Complete gas and chemical protection suit (gas-tight), ideal for firefighters. One-piece design with a molded rubber seal in the hood for a secure fit under full-face masks. Features a 130 cm gastight zip, integrated gloves, boots, and pressure relief valves. Lightweight, flexible, reusable, and highly chemical-resistant. Silent, ultra-comfortable. Color: Signal orange.

This fully encapsulating Type 1A-ET

gas-tight suit protects emergency re-

sponders from toxic gases, liquids, and chemicals. Made from lightweight

DuPontô TychemÆ TKa barrier fabric. Certified to EN 943-2:2019 (ET) and

SOLAS standards. Five-year mainten-

ance-free shelf life, with annual tests

Part Number: 0222-212XL

#### RESPIREX GTR REGULAR ROBUSTNESS GAS-TIGHT SUIT



from year 5 up to 10 years.

Part Number: GTR

#### **RESPIREX GTL GAS-TIGHT SUIT**



The GTL is a Type 1A-ET single-use gas-tight suit designed for emergency responders, offering protection against toxic gases, liquids, and chemicals. Made from lightweight Chemprotexô 400 multi-layer barrier fabric for superior comfort. Certified to EN 943-2:2019 (ET) and SOLAS standards. Seven-year maintenance-free shelf life, maximum of 10 years.

Part Number: GTL

#### **RESPIREX SC1 SPLASH SUIT**



The SC1 is a single-use, liquid-tight (Type 3) chemical protective suit made from high-performance Chemprotexô 300 fabric. It protects against liquid chemical splashes and can be used with external breathing apparatus or a full facemask and filter. Designed for non-immediately hazardous areas. Certified to SOLAS standards. Ten-year shelf life.

Part Number: SC1

#### **RESPIREX ISOTEC BOOTS**



A heat and flame-resistant safety boot meeting EN 15090 HI3 F3A standards for flame resistance, radiant heat (20kW/m≤), and sole insulation (250∞C for 40 min). Ideal for welding, grinding, or firefighting. CE marked, REACH compliant, machine washable (40 $\infty$ C), and chemically resistant (EN 13832-3:2018). Shelf life over 10 years. EU sizes 35-50

Part Number: ISOTEC BOOOTS

#### SEA HORSE SAR



A gas-tight containment bag designed for 200L (600mm<sup>-</sup> x 880mm) chemical storage drums. Safely contains and transports leaking drums or hazardous vapors. Made from durable Chemprotexô X multi-layer barrier fabric. Includes bag, neoprene gloves, hood, and beanie. Tested to ISO 17491-1:2012. Seven-year maintenance-free shelf life, max 10 years

Part Number: CONTAINER



# CUSTON CATALOGS Jour Ship. atolog

- Choose products from our comprehensive range
- Add specific equipment outside our standard catalog
- Ensure your crew always has what they need
- Let MariTeam manage everything for you



FIRE EXTINGUISHEF

**CUSTOM CATALOGS** 

# **WEATED CATALOG**

For your fleet making ordering simple and efficient. One supplier, one solution.

# TAILORED TO YOUR FLEET'S NEEDS

At MariTeam, we understand that every company has unique requirements. That's why we offer fully customized catalogs tailored to your ship's specific needs. Select products from our extensive range or add additional items, and we'll handle everything —ensuring a seamless supply chain and inventory management.

# SAFETY, REDUCING COSTS, & PREVENTING ERRORS

A customized catalog is more than just a convenience —it's a strategic advantage. By standardizing the equipment onboard your fleet, you minimize the risk of ordering errors, compatibility issues, and supply delays. This not only enhances safety and compliance but also helps to reduce operational costs by optimizing procurement and avoiding unnecessary stockpiling.

By working closely with you, MariTeam facilitates ongoing collaboration between shipowners, operators, and suppliers. This ensures that your catalog remains up-to-date, efficient, and tailored to your evolving needs. Together, we create a smarter, safer, and more cost-effective supply solution for your fleet.

**CUSTOM CATALOGS** 

# STAY SAFE STAY STAY STAY PREPARED TRUST





NOTES	
INOTEO	
	6
sales@mariteam.dk · www.mariteam.dk	

13

Min Soldan



# NARITEAM RESCUEFIRE PROTECTING SEAFARERS SINCE 1952

BROCHURE

RESCUE, LIFE SAVING & FIRE EQUIPMENT sales@mariteam.dk · www.mariteam.dk